


ADJUSTABLE GROOVES CUTTERHEAD FOR TENONS 8-15MM (Z=4 + V=4) - Ø250MM

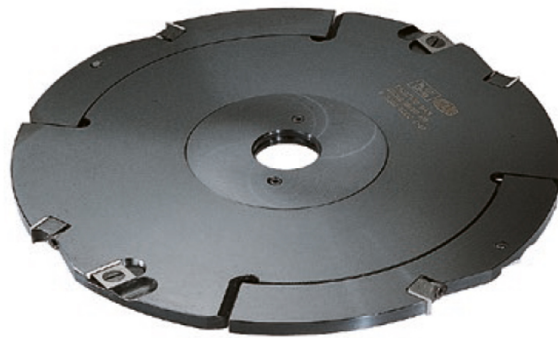

€433,88 - €458,67 (excl. VAT)

Cutterhead with reversible blades and spurs in high quality carbide (HW) for making precision grooves.

Adjustable in height between 8mm and 15mm by means of spacer rings. Spacer rings included as standard. Use this cutterhead also for milling tenons or for rabbeting. Thanks to the tungsten carbide blades, this cutterhead cuts effortlessly through solid boards, hard and soft woods, MDF or laminated boards.


Available with bore 30mm or 50mm.

SKU: N/A

VARIATIONS

Image	SKU	Description	Shaft diameter	Price
	ST-TH06TM10-50		50 mm	€458,67 (excl. VAT)
	ST-TH06TM10-30		30 mm	€433,88 (excl. VAT)

GALERIJAFBEELDINGEN

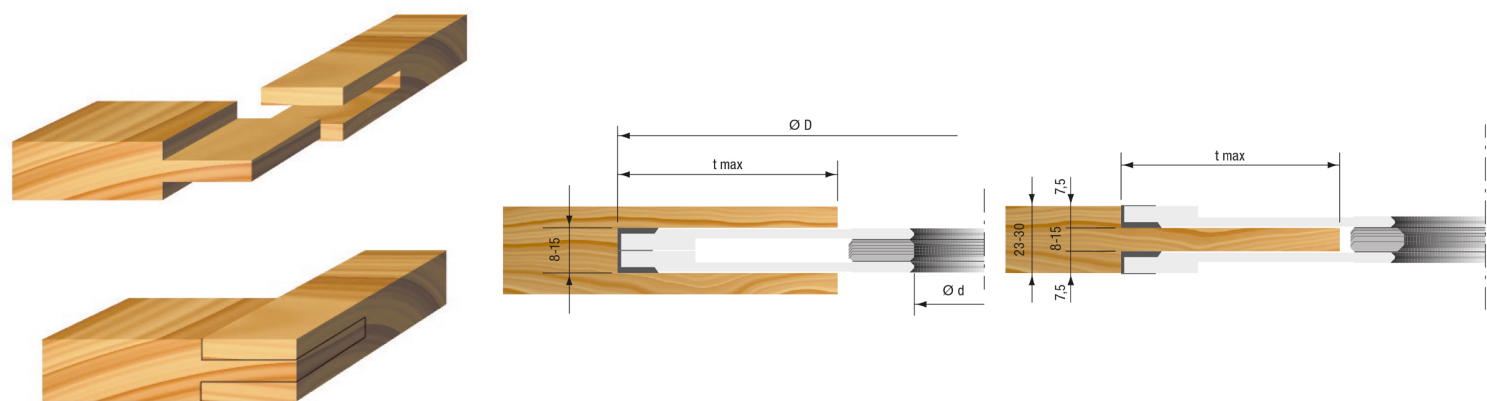

Cutterhead with reversible blades and spurs in high quality carbide (HW) for making precision grooves. Adjustable in height between 8mm and 15mm by means of spacer rings. Spacer rings included as standard. Use this cutterhead also for milling tenons or for rabbeting. Thanks to the tungsten carbide blades, this cutterhead cuts effortlessly through solid boards, hard and soft woods, MDF or laminated boards.

Available with bore 30mm or 50mm.

PRODUCT INFORMATION

- For spindle moulder machines
- For making precision grooves and slots
 - For tenon milling
 - For rabbeting
- For laminated panels or MDF
 - Hard and soft wood

DESCRIPTION

Cutterhead with reversible blades and spurs in high quality carbide (HW) for making precision grooves. Adjustable in height between 8mm and 15mm by means of spacer rings. Spacer rings included as standard. Use this cutterhead also for milling tenons or for rabbeting. Thanks to the tungsten carbide blades, this cutterhead cuts effortlessly through solid boards, hard and soft woods, MDF or laminated boards. Available with bore 30mm or 50mm.

No video available for this product!

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

Weight

1 kg

diameter	250mm
Shaft diameter	30 mm, 50 mm
Cutting edges	4
Number of teeth	4
Cutting length	90mm
Height of groove	8-15mm
RPM Min-Max	3000-5000