

## BELMASH - EASY ROLLER ER200 PLATE CLAMP TROLLEY





~~€90,08~~ **€78,51** (excl. VAT)

This self-clamping clamping trolley is the solution for the easy transport of doors, frames, plates, etc. for construction and work floors and has a load capacity of up to 200 kg.

**SKU:** BEL-ER200

### GALERIJAFBEELDINGEN

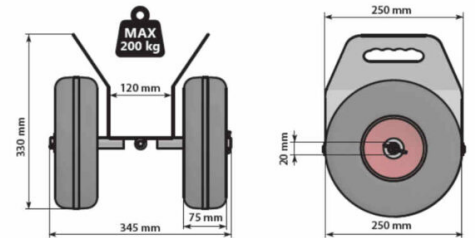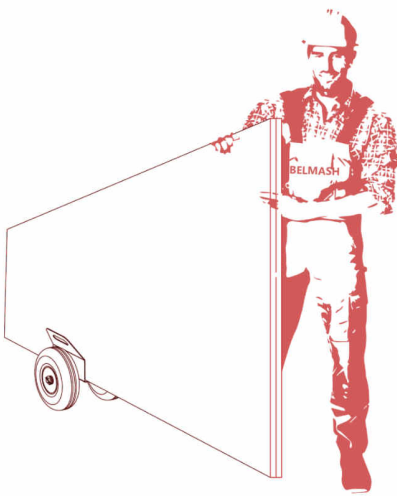

This self-clamping plate clamp trolley is the solution for the easy transport of doors, frames, plates, etc. for construction and work floors and has a load capacity of up to 200 kg. When the material is placed in the Easy Roller, it automatically clamps the material itself due to its hinging effect. What was previously carried with two people, can now be done alone with the help of the Easy Roller, which prevents excessive physical strain on the body. The Easy Roller has a sturdy protective layer to prevent damage to the material to be transported.

## PRODUCT INFORMATION

- Maximum thickness 120mm
- Load capacity 200 kg

- Protective layer on the inside
- Clamps easily due to the hinged effect
- Solid rubber, puncture-proof tyres

### DESCRIPTION

This self-clamping plate clamp trolley is the solution for the easy transport of doors, frames, plates, etc. for construction and work floors and has a load capacity of up to 200 kg. When the material is placed in the Easy Roller, it automatically clamps the material itself due to its hinging effect. What was previously carried with two people, can now be done alone with the help of the Easy Roller, which prevents excessive physical strain on the body. The Easy Roller has a sturdy protective layer to prevent damage to the material to be transported.

### DOWNLOADS

No download available.

### ADDITIONAL INFORMATION

|                                |                                      |
|--------------------------------|--------------------------------------|
| <b>Weight</b>                  | 4,5 kg                               |
| <b>Load capacity</b>           | 200 kg                               |
| <b>Max. clamping thickness</b> | 120 mm                               |
| <b>Material</b>                | steel 2.5 mm thick, pneumatic wheels |