

## CUTTER HEAD FOR 45° BEVELS (Z=2) - Ø150MM





**€190,08 - €202,47 (excl. VAT)**

Cutter head in light alloy with reversible blades in high quality tungsten carbide (HW). The knives are angled 45° for precise bevel cuts and a perfect finish. This cutter head is perfectly suited for cutting 45° bevels, for instance to produce frames. Thanks to the tungsten carbide knives, this cutter head cuts effortlessly through solid boards or solid woods and you always obtain a smooth surface. Also suitable for use on laminated materials.



Available with bore 30mm or 50mm.

**SKU:** N/A

## VARIATIONS

Image	SKU	Description	Shaft diameter	Price
	ST-YH131AAM-50		50 mm	€202,47 (excl. VAT)
	ST-YH131AAM-30		30 mm	€190,08 (excl. VAT)

## GALERIJAFBEELDINGEN

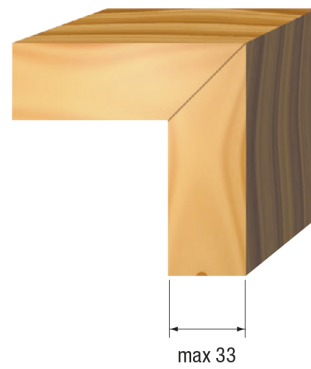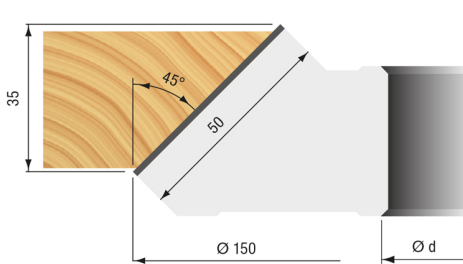

Cutter head in light alloy with reversible blades in high quality tungsten carbide (HW). The knives are angled 45° for precise bevel cuts and a perfect finish. This cutter head is perfectly suited for cutting 45° bevels, for instance to produce frames. Thanks to the tungsten carbide knives, this cutter head cuts effortlessly through solid boards or solid woods and you always obtain a smooth surface. Also suitable for use on laminated materials.

Available with bore 30mm or 50mm.

### PRODUCT INFORMATION

- For spindle moulder machines
  - For 45° bevel cuts
  - Clean, smooth cut
- For laminated panels or MDF
  - Hard and soft wood

### DESCRIPTION

Cutter head in light alloy with reversible blades in high quality tungsten carbide (HW). The knives are angled 45° for precise bevel cuts and a perfect finish. This cutter head is perfectly suited for cutting 45° bevels, for instance to produce frames. Thanks to the tungsten carbide knives, this cutter head cuts effortlessly through solid boards or solid woods and you always obtain a smooth surface. Also suitable for use on laminated materials. Available with bore 30mm or 50mm.

No video available for this product!

### DOWNLOADS

No download available.

### ADDITIONAL INFORMATION

#### Weight

1 kg

<b>diameter</b>	150mm
<b>Shaft diameter</b>	30 mm, 50 mm
<b>Cutting edges</b>	2
<b>Height of groove</b>	36mm
<b>RPM Min-Max</b>	5000-9500, 5100-8800