

CUTTER HEAD FOR 45° BEVELS (Z=2) - Ø150MM





€190,08 - €202,47 (excl. VAT)

Cutter head in light alloy with reversible blades in high quality tungsten carbide (HW). The knives are angled 45° for precise bevel cuts and a perfect finish. This cutter head is perfectly suited for cutting 45° bevels, for instance to produce frames. Thanks to the tungsten carbide knives, this cutter head cuts effortlessly through solid boards or solid woods and you always obtain a smooth surface. Also suitable for use on laminated materials.



Available with bore 30mm or 50mm.

SKU: N/A

VARIATIONS

Image	SKU	Description	Shaft diameter	Price
	ST-YH131AAM-50		50 mm	€202,47 (excl. VAT)
	ST-YH131AAM-30		30 mm	€190,08 (excl. VAT)

GALERIJAFBEELDINGEN

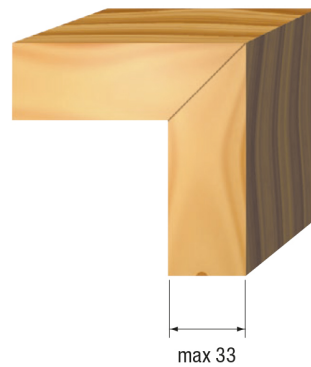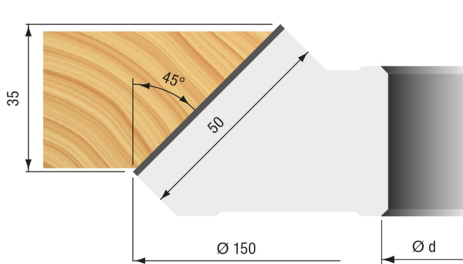

Cutter head in light alloy with reversible blades in high quality tungsten carbide (HW). The knives are angled 45° for precise bevel cuts and a perfect finish. This cutter head is perfectly suited for cutting 45° bevels, for instance to produce frames. Thanks to the tungsten carbide knives, this cutter head cuts effortlessly through solid boards or solid woods and you always obtain a smooth surface. Also suitable for use on laminated materials.

Available with bore 30mm or 50mm.

PRODUCT INFORMATION

- For spindle moulder machines
 - For 45° bevel cuts
 - Clean, smooth cut
- For laminated panels or MDF
 - Hard and soft wood

DESCRIPTION

Cutter head in light alloy with reversible blades in high quality tungsten carbide (HW). The knives are angled 45° for precise bevel cuts and a perfect finish. This cutter head is perfectly suited for cutting 45° bevels, for instance to produce frames. Thanks to the tungsten carbide knives, this cutter head cuts effortlessly through solid boards or solid woods and you always obtain a smooth surface. Also suitable for use on laminated materials. Available with bore 30mm or 50mm.

No video available for this product!

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

Weight

1 kg

diameter	150mm
Shaft diameter	30 mm, 50 mm
Cutting edges	2
Height of groove	36mm
RPM Min-Max	5000-9500, 5100-8800