

DOUBLE DRUM SANDER TT660





€3 .016,52 (excl. VAT)

The TT660 has a powerful induction motor for continuous work, a double drum, precise height adjustment and a quick-release device for the sanding belts.

SKU: OSA0660/2

GALERIJAFBEELDINGEN

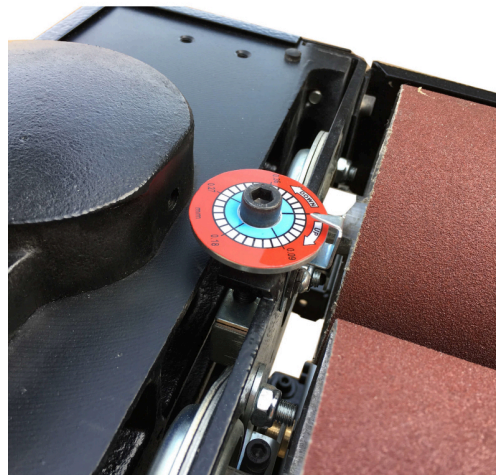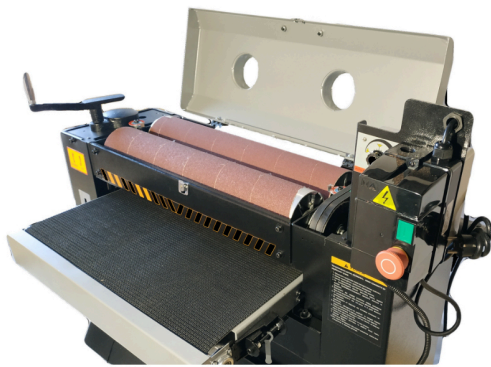

The balanced drums of the TT660 provide smooth running and highly efficient sanding performance. The conveyor belt can be easily adjusted, and the sanding belt can be easily changed. It has a powerful induction motor for continuous work, a precise height adjustment and a quick-release device for sanding belts with easy change. The sanding belt is applied eccentrically to the sanding roller, avoiding streaks. This is a powerful and robust machine, suitable for professional continuous use. The rear sanding roller has a fine adjustment for removal. The hard rubber lining of the sanding drums guarantees an excellent sanding performance. At the top, you will find two dust outlets for dust-free work.

The machine is supplied as standard with 1 x 120-grit paper and 1 x 80-grit paper. The sanding belt is also available in other grit sizes.

PRODUCT INFORMATION

- 230 V / 3 HP and 1/6 HP induction motor
 - Double drum 660 x 127 mm
 - Double dust extraction 2 x 100 mm
- Precise height adjustment (min. 7 mm – max. 305 mm)
 - Quick-release device for the sanding belts
- Sanding belts are applied eccentrically to the sanding roller
 - Sanding drums with hard rubber coating
 - Adjustable feeding speed
 - Capacity: 660 x 305 mm
 - Safety switch

DESCRIPTION

The balanced drums of the TT660 provide smooth running and highly efficient sanding performance. The conveyor belt can be easily adjusted, and the sanding belt can be easily changed. It has a powerful induction motor for continuous work, a precise height adjustment and a quick-release device for sanding belts with easy change. The sanding belt is applied eccentrically to the sanding roller, avoiding streaks. This is a powerful and robust machine, suitable for professional continuous use. The rear sanding roller has a fine adjustment for removal. The hard rubber lining of the sanding drums guarantees an excellent sanding performance. At the top, you will find two dust outlets for dust-free work. The machine is supplied as standard with 1 x 120-grit paper and 1 x 80-grit paper. The sanding belt is also available in other grit sizes.

No video available for this product!

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

Weight	223 kg
Motor	0,17 PK, 3 HP

Grain	K60, K80, K100, K120, K150, K240
Sanding belt	2750 x 102 mm
Exhaust	2x100mm
Voltage	230 V