

GUIDE RINGS WITH BALL BEARING BORE 50MM




€332,90 (excl. VAT)

This set with ball bearing and accompanying guide rings is perfect for all calibrating and copying work on your milling machine. Use the ball bearing to ensure that your workpiece always glides smoothly along the cutter head. The ball bearing has a diameter of 80mm. In addition, the set also contains guide rings with outer diameters of 95, 100, 105, 110, 115, 120, 125, 130 and 135mm.

Tip: Use this set in combination with our vertical quick release clamp. Use the quick release clamp to secure the workpiece to the mould so that you do not get your hands near the cutter.

SKU: KL-TX0050.50

GALERIJAFBEELDINGEN

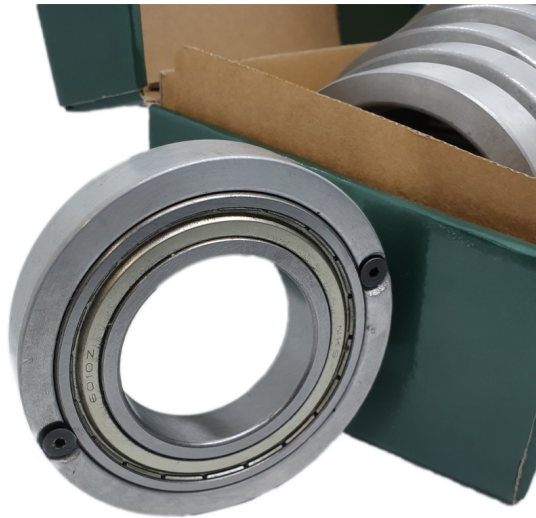

This set with ball bearing and accompanying guide rings is perfect for all calibrating and copying work on your milling machine. Use the ball bearing to ensure that your workpiece always glides smoothly along the cutter head. The ball bearing has a diameter of 80mm. In addition, the set also contains guide rings with outer diameters of 95, 100, 105, 110, 115, 120, 125, 130 and 135mm.

Tip: Use this set in combination with our vertical quick release clamp. Use the quick release clamp to secure the workpiece to the mould so that you do not get your hands near the cutter.

PRODUCT INFORMATION

- For spindle moulder machines
- Calibrating and copying work
- Ball bearing with four guide rings

DESCRIPTION

This set with ball bearing and accompanying guide rings is perfect for all calibrating and copying work on your milling machine. Use the ball bearing to ensure that your workpiece always glides smoothly along the cutter head. The ball bearing has a diameter of 80mm. In addition, the set also contains guide rings with outer

diameters of 95, 100, 105, 110, 115, 120, 125, 130 and 135mm. Tip: Use this set in combination with our vertical quick release clamp. Use the quick release clamp to secure the workpiece to the mould so that you do not get your hands near the cutter.

No video available for this product!

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

Weight	2 kg
Shaft diameter	50 mm