

HELICAL PLANING AND ROUTING CUTTERHEAD 76,5MM (Z=12)




€190,08 - €208,26 (excl. VAT)

Helical planing and routing cutterhead with reversible knives in high quality carbide (HW). This cutter head is developed for finishing, planing or calibrating on moulding machines. Optionally you can use a mold and run-up ring to make curved workpieces. Thanks to the tungsten carbide blades, this cutterhead cuts effortlessly through solid boards, hard and soft woods, MDF or laminated boards.


Available with bore 30mm or 50mm. The heads can be fitted with spurs on one or both sides on demand.

SKU: N/A

VARIATIONS

Image	SKU	Description	Shaft diameter	Price
	ST-TH74TA01-30		50 mm	€208,26 (excl. VAT)
			30 mm	€190,08 (excl. VAT)

GALERIJAFBEELDINGEN

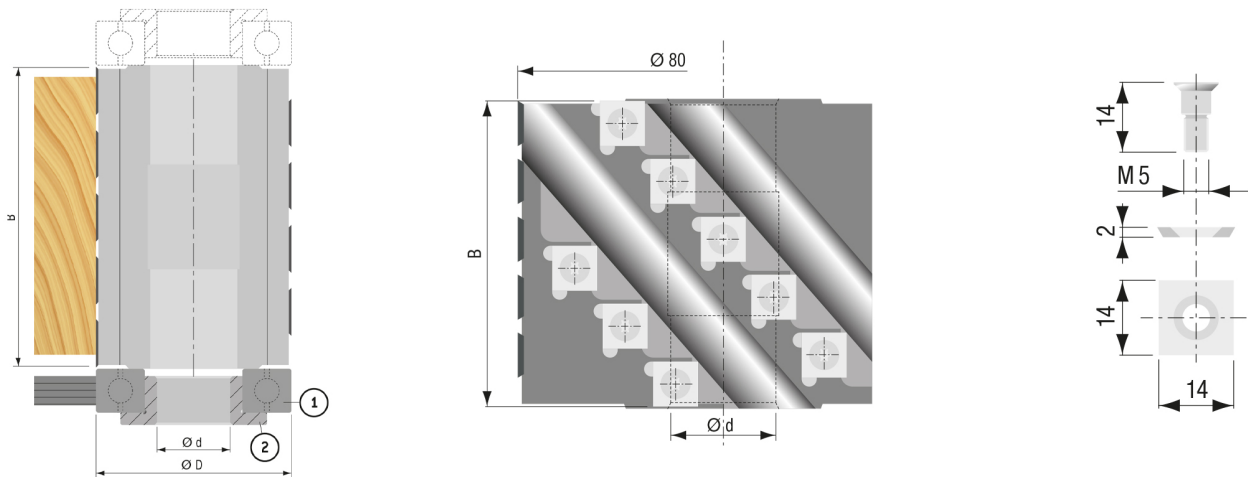

Helical planing and routing cutterhead with reversible knives in high quality carbide (HW). This cutter head is

developped for finishing, planing or calibrating on moulding machines. Optionally you can use a mold and run-up ring to make curved workpieces. Thanks to the tungsten carbide blades, this cutterhead cuts effortlessly through solid boards, hard and soft woods, MDF or laminated boards.

Available with bore 30mm or 50mm. The heads can be fitted with spurs on one or both sides on demand.

PRODUCT INFORMATION

- For spindle moulder machines
 - For finishing or calibrating
- Use a mold to make curved pieces
 - For laminated panels or MDF
 - Hard and soft wood

DESCRIPTION

Helical planing and routing cutterhead with reversible knives in high quality carbide (HW). This cutter head is developped for finishing, planing or calibrating on moulding machines. Optionally you can use a mold and run-up ring to make curved workpieces. Thanks to the tungsten carbide blades, this cutterhead cuts effortlessly through solid boards, hard and soft woods, MDF or laminated boards.

Available with bore 30mm or 50mm. The heads can be fitted with spurs on one or both sides on demand.

No video available for this product!

DOWNLOADS

No download availble.

ADDITIONAL INFORMATION

Weight	1 kg
diameter	
Shaft diameter	30 mm, 50 mm

Cutting edges	12
Height of groove	76,5mm
RPM Min-Max	6000-17600