

HOT MELT PORTABLE EDGE BANDER PEB200+





€1 .825,18 (excl. VAT)

Hot melt portable edge bander for gluing pre-cut PVC, ABS, melamine or wood edges on straight, round or shaped panels. The machine is suitable for processing edge bands with thicknesses between 0.4-3mm and 10-62mm height. The edge adhesive PEB200, like all other Virutex models, is fitted with a patented Teflon®-coated glue pot. After use, it is very easy to clean the glue container again, which makes this edge bander much easier to maintain. This also means that you can use other colored adhesives quickly and without any problems.

The model PEB200 has a fixed speed and temperature. Also available with adjustable temperature and speed as model PEB250+.

SKU: VIR-PEB200

GALERIJAFBEELDINGEN

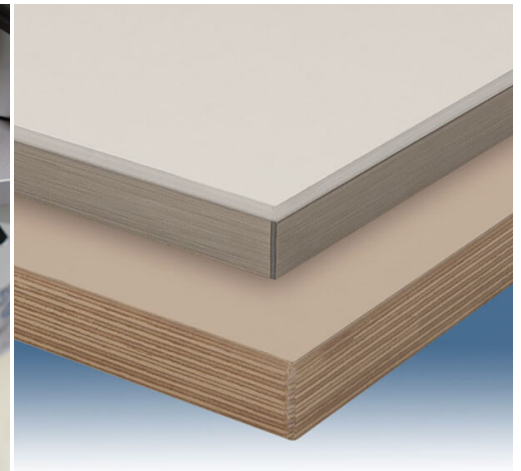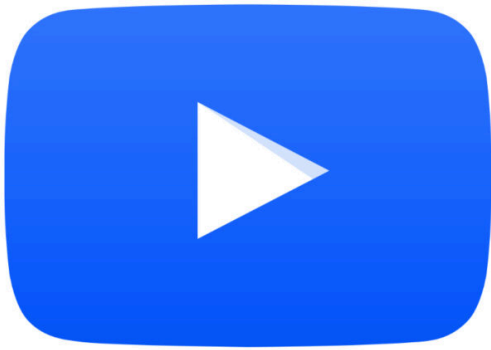

Hot melt portable edge bander for gluing pre-cut PVC, ABS, melamine or wood edges on straight, round or shaped panels. The machine is suitable for processing edge bands with thicknesses between 0.4-3mm and 10-62mm height. Thanks to the wide support, you always place the edge bander securely on the workpiece. The automatic rollers and feed with guide system do the rest and help you to slide the machine smoothly along the side. The height and thickness of the edgebanding is very easy to adjust using the millimetre control. Thanks to the tilting support, you can then work at angles greater than 90°. Finally, the machine also has an adjustable glue dosage so that you always use the right quantity for your workpiece.

The edge adhesive PEB200, like all other Virutex models, is fitted with a patented Teflon®-coated glue pot. This coating offers some very important advantages over other, similar machines. After use, it is very easy to clean the glue container again, which makes this edge bander much easier to maintain. This also means that you can use other colored adhesives quickly and without any problems. No additional adjustments are required to change the glue between two projects, even if it's differently colored. The adhesive rollers have been polymerised to prevent damage to your edge bands.

Can be mounted in a table to work with larger workpieces. The model PEB200 has a fixed speed and temperature. Also available with adjustable temperature and speed as model PEB250+.

PRODUCT INFORMATION

- Portable edge bander
 - Glue dosage control
- Patented Teflon® glue pot (230cm³)
- Automatic rollers and guiding system
- For straight, round or shaped panels
 - Thickness 0,4mm - 3mm
 - Thickness 10mm - 62mm
- Gluing roller with polymerization processing

DESCRIPTION

Hot melt portable edge bander for gluing pre-cut PVC, ABS, melamine or wood edges on straight, round or shaped panels. The machine is suitable for processing edge bands with thicknesses between 0.4-3mm and 10-62mm height. Thanks to the wide support, you always place the edge bander securely on the workpiece. The automatic rollers and feed with guide system do the rest and help you to slide the machine smoothly along the side. The height and thickness of the edgebanding is very easy to adjust using the millimetre control. Thanks to the tilting support, you can then work at angles greater than 90°. Finally, the machine also has an adjustable glue dosage so that you always use the right quantity for your workpiece. The edge adhesive PEB200, like all other Virutex models, is fitted with a patented Teflon®-coated glue pot. This coating offers some very important advantages over other, similar machines. After use, it is very easy to clean the glue container again, which makes this edge bander much easier to maintain. This also means that you can use other colored adhesives quickly and without any problems. No additional adjustments are required to change the glue between two projects, even if it's differently colored. The adhesive rollers have been polymerised to prevent damage to your edge bands. Can be mounted in a table to work with larger workpieces. The model PEB200 has a fixed speed and temperature. Also available with adjustable temperature and speed as model

PEB250+.

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

Weight	9 kg
Input Power	830W
Capacity glue container	230cm ³
Temperature settings	170°C
Working speed	3.6m/min
Min-Max. height of edge band	10-62mm
Min-Max. thickness of edge band	0.4-3mm