


## KREG AUTOMAXX 90° ANGLE CLAMP

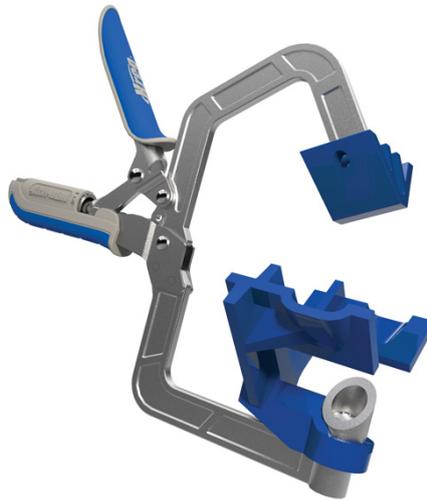

**€54,99 (excl. VAT)**

With the Kreg Automaxx angle clamp you simply and powerfully clamp 90° angle connections. Due to the Automaxx transmission in the handle, the clamping force is always optimal and the workpiece is securely clamped. There is a wheel in the handle to adjust the power transmission; heavier or lighter.

This angle clamp is equipped with recesses. With these notches, you can make Kreg connections even faster and neater. The clamp holds the workpiece in place and you screw the workpiece on.  
Suitable for material up to 25.4 mm (1") thick.

**SKU:** KRE-KHCCC

## GALERIJAFBEELDINGEN



With the Kreg Automaxx angle clamp you simply and powerfully clamp 90° angle connections. Due to the Automaxx transmission in the handle, the clamping force is always optimal and the workpiece is securely clamped. There is a wheel in the handle to adjust the power transmission; heavier or lighter.

This angle clamp is equipped with openings. With these openings, you can make Kreg connections even faster and neater. The clamp holds the workpiece in place and you screw the workpiece on.

Suitable for material up to 25.4 mm (1") thick.

## PRODUCT INFORMATION

- Suitable for 90° angles and T-joints
- Cast aluminium V and wedge terminal blocks
  - For materials up to 25.4 mm thick
  - Self-adjusting Automaxx technology
- Adjusting screw to set the clamping pressure
- Cut-out to fit a pocket hole without removing the clamp
  - Ergonomic handles

## DESCRIPTION

With the Kreg Automaxx angle clamp you simply and powerfully clamp 90° angle connections. Due to the Automaxx transmission in the handle, the clamping force is always optimal and the workpiece is securely clamped. There is a wheel in the handle to adjust the power transmission; heavier or lighter. This angle clamp is equipped with openings. With these openings, you can make Kreg connections even faster and neater. The clamp holds the workpiece in place and you screw the workpiece on. Suitable for material up to 25.4 mm (1") thick.

No video available for this product!

## DOWNLOADS

No download available.

## ADDITIONAL INFORMATION

**Weight** 0,5 kg