

KREG PRECISION GUIDE FOR BAND SAW



€191,99 (excl. VAT)

Most bandsaw blades do not run perfectly perpendicular to the front of the table. There is always just a little bit of "drift" that prevents you from getting precise cuts, even if you use a fence.



The Kreg® Precision Band Saw fence easily adjusts to the blade drift angle to give you a new level of band saw accuracy.

This fence can be mounted on most 356 mm (14") band saws straight out of the box and can be adapted to many others by drilling a single hole in the aluminium mounting rail.

Never before has it been possible to make such a wide variety of cuts with a band saw fence. This stop adjusts both for blade deviation and perpendicularity to the blade (essential when cutting thin veneer). In addition, the stop can be quickly placed in an inconspicuous position, allowing the blade guides to be positioned closer to the workpiece. In addition, the fence can accept repeating sawn guides or Kreg® Stops for use in additional applications.

SKU: KRE-KMS7200

GALERIJAFBEELDINGEN

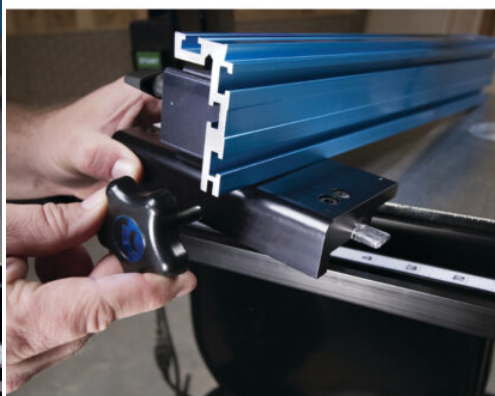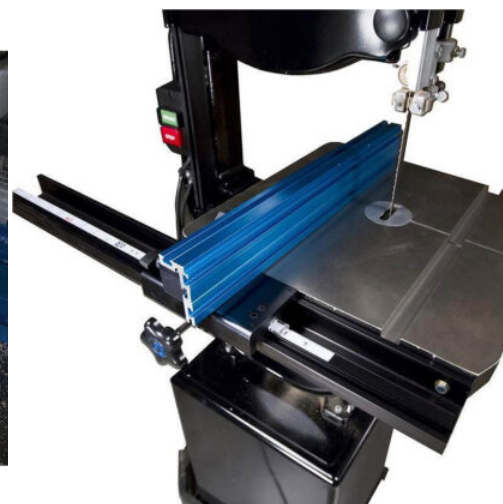

Most bandsaw blades do not run perfectly perpendicular to the front of the table. There is always just a little bit of "drift" that prevents you from getting precise cuts, even if you use a fence.

The Kreg® Precision Band Saw fence easily adjusts to the blade drift angle to give you a new level of band saw accuracy.

This fence can be mounted on most 356 mm (14") band saws straight out of the box and can be adapted to many others by drilling a single hole in the aluminium mounting rail.

Never before has it been possible to make such a wide variety of cuts with a band saw fence. This stop adjusts both for blade deviation and perpendicularity to the blade (essential when cutting thin veneer).

In addition, the stop can be quickly placed in an inconspicuous position, allowing the blade guides to be positioned closer to the workpiece. In addition, the fence can accept repeating sawn guides or Kreg® Stops for use in additional applications.

Straight, strong and rigid design

The aluminium fence is incredibly strong, straight and built to last for years. The front and top of the fence contain T-slots for adding stops, guides for repeating saws and more.

Easy to remove

When you don't need the fence, remove it in seconds - no tools needed! Simply loosen the locking button and lift the fence off the mounting rail, which is below the table surface, so that it is not in the way.

Precision Lens Cursors

The thin red line on the Precision Lens Cursor is enlarged and easy to read for even the smallest adjustments, allowing you to fine-tune the stop for cutting veneers, pins and more.

Adjustable in two sizes

This fence is unique in that it can adjust itself to fit perfectly square to your table and top. With two simple adjustments, you can set the stop to match the blade deviation, thus significantly improving cutting accuracy.

Usability

Pre-drilled holes on the mounting rail are suitable for most 356 mm (14") band saws.

PRODUCT INFORMATION

- Made of anodised aluminium
- Cursor with precision lens for precise cuts
 - Mounting rail 660 mm long
- Easy to adjust, perpendicular to the table and with correction of blade drift
 - Guide rail 457 mm long
- Pre-drilled holes to which most band saws fit

DESCRIPTION

Most bandsaw blades do not run perfectly perpendicular to the front of the table. There is always just a little bit of "drift" that prevents you from getting precise cuts, even if you use a fence. The Kreg® Precision Band Saw fence easily adjusts to the blade drift angle to give you a new level of band saw accuracy. This fence can be mounted on most 356 mm (14") band saws straight out of the box and can be adapted to many others by drilling a single hole in the aluminium mounting rail. Never before has it been possible to make such a wide variety of cuts with a band saw fence. This stop adjusts both for blade deviation and perpendicularity to the blade (essential when cutting thin veneer). In addition, the stop can be quickly placed in an inconspicuous position, allowing the blade guides to be positioned closer to the workpiece. In addition, the fence can accept repeating sawn guides or Kreg® Stops for use in additional applications. **Straight, strong and rigid design**

The aluminium fence is incredibly strong, straight and built to last for years. The front and top of the fence contain T-slots for adding stops, guides for repeating saws and more. **Easy to remove** When you don't need the fence, remove it in seconds - no tools needed! Simply loosen the locking button and lift the fence off the mounting rail, which is below the table surface, so that it is not in the way. **Precision Lens Cursors** The thin red line on the Precision Lens Cursor is enlarged and easy to read for even the smallest adjustments, allowing you to fine-tune the stop for cutting veneers, pins and more. **Adjustable in two sizes** This fence is unique in that it can adjust itself to fit perfectly square to your table and top. With two simple adjustments, you can set the stop to match the blade deviation, thus significantly improving cutting accuracy. **Usability** Pre-drilled holes on the mounting rail are suitable for most 356 mm (14") band saws.

No video available for this product!

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

Weight	4 kg
Length	457 mm, 660 mm