


LATHE TT1100DI



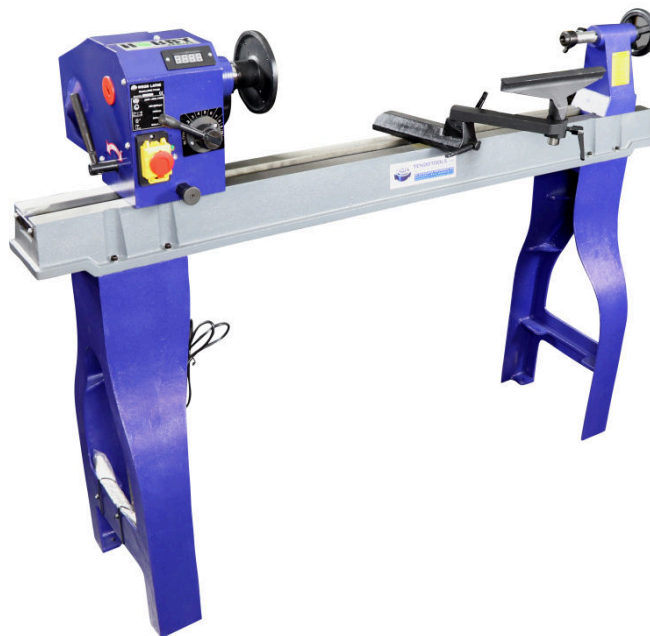


€904,96 (excl. VAT)

The TT1100 is a solid, high-capacity lathe with a distance of 1100 mm between the centers and variomatic speeds that will certainly appeal to the professional or dedicated hobbyist.

SKU: 0LA100D

GALERIJAFBEELDINGEN

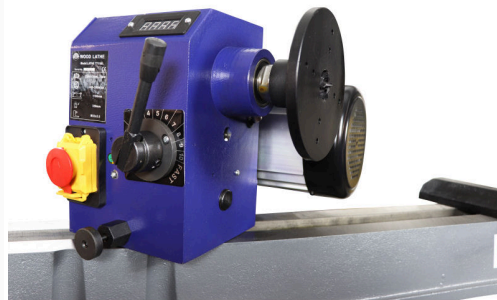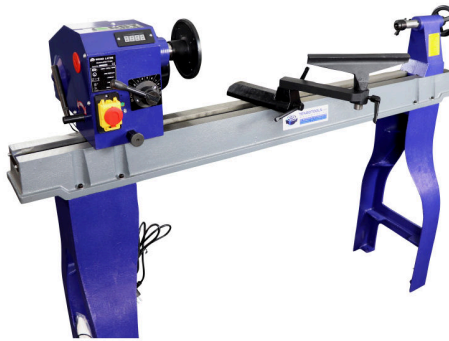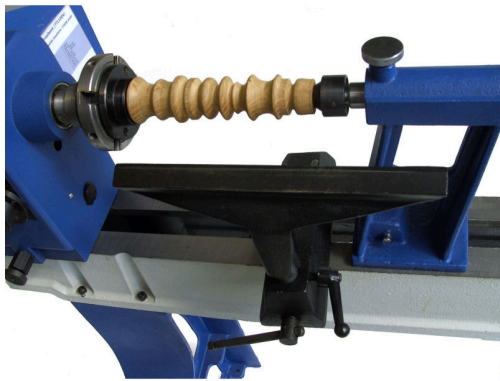

The TT1100 is a lathe that will certainly appeal to the professional or dedicated hobbyist looking for a sturdy and strong machine. This lathe is equipped with an M33 x 3.5 mm thread according to the European standard.

Consequently, all accessories can be fitted without the need for adapters. A high-capacity lathe with an excellent price-performance ratio. Thanks to its distance of 1100 mm between the centers, the variomatic speeds and the rotating head, it can also turn large pieces (e.g. table legs, stair railings, etc.) A copier is also available optionally.

The lathe is equipped with variomatic speed control. This means you can easily change the speed with one lever without having to move belts.

PRODUCT INFORMATION

- Lathe with variable speed control for hobbyists
 - Digital display
 - 230V/750 W induction engine
- Variable speed regulation of 600 to 2400 t/min.
 - Spindle with thread M33 x 3.5 mm
 - Easily adjustable tool support
- The motor block with the spindle can be rotated up to 180° laterally.
 - Distance of 1100 mm between the centers

DESCRIPTION

The TT1100 is a lathe that will certainly appeal to the professional or dedicated hobbyist looking for a sturdy and strong machine. This lathe is equipped with an M33 x 3.5 mm thread according to the European standard.

Consequently, all accessories can be fitted without the need for adapters. A high-capacity lathe with an excellent price-performance ratio. Thanks to its distance of 1100 mm between the centers, the variomatic speeds and the rotating head, it can also turn large pieces (e.g. table legs, stair railings, etc.) A copier is also available optionally. The lathe is equipped with variomatic speed control. This means you can easily change the speed with one lever without having to move belts.

No video available for this product!

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

| | |
|---------------------------------------|---------------------|
| Weight | 170 kg |
| Dimensions | 1550 × 460 × 520 cm |
| Variomatic speeds | Yes |
| Working diameter over guideway | 350 mm |

| | |
|---|----------|
| Distance between centers | 1100 mm |
| Rotating head | Yes |
| Working diameter over guideway | 350 mm |
| RPM Min-Max | 600-2400 |
| Input Power | 750W |
| Voltage | 230 V |
| Taper of tailstock sleeve | MC 2 |
| Thread | M33 |