


## LATHE TT457E

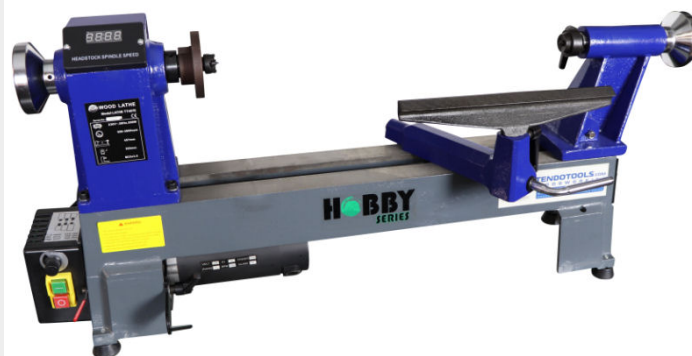

**€412,39 (excl. VAT)**

Thanks to the stability of its cast iron frame, the TT457E lathe guarantees a precise finish without vibrations. With its comprehensive basic equipment (LED display, continuous rotation speed control, etc.), this is the ideal entry-level model for hobbyists and amateur handymen.

**SKU:** TEN-18010

## GALERIJAFBEELDINGEN



| MODEL                                                                               | Lathe TT457E   |
|-------------------------------------------------------------------------------------|----------------|
|    | 230V           |
|    | 550W           |
|    | 650-3800Tr/min |
|    | 457mm          |
|   | 305mm          |
|  | M33            |
|  | 840x460x300mm  |
|  | 40KG           |

Thanks to the stability of its cast iron frame, the TT457E lathe guarantees a precise finish without vibrations. With its comprehensive basic equipment (LED display, continuous rotation speed control, etc.), this is the ideal entry-level model for hobbyists and amateur handymen.

The lathe has a point interval of 457 mm. It has an M33 x 3.5 mm thread on the spindle as standard, so all your favourite attachments fit without the need for adapters. In addition, the lathe has three continuously adjustable speeds. The speed is electronically adjustable and can be read digitally.

Thanks to the extension piece, you can extend the lathe to a point distance of 1007 mm.

## PRODUCT INFORMATION

- Compact lathe for numerous small projects and precision work
  - 230 V/550 W induction motor
- Three mechanical speeds that are easily adjustable
  - Spindle with M33 thread
  - Easily adjustable tool support
- Electronically adjustable rotation speed with digital display
  - Distance between centers: 457 mm
  - Extension optional

## DESCRIPTION

Thanks to the stability of its cast iron frame, the TT457E lathe guarantees a precise finish without vibrations. With its comprehensive basic equipment (LED display, continuous rotation speed control, etc.), this is the ideal entry-level model for hobbyists and amateur handymen. The lathe has a point interval of 457 mm. It has an M33 x 3.5 mm thread on the spindle as standard, so all your favourite attachments fit without the need for adapters. In addition, the lathe has three continuously adjustable speeds. The speed is electronically adjustable and can be read digitally. Thanks to the extension piece, you can extend the lathe to a point distance of 1007 mm.

No video available for this product!

## DOWNLOADS

No download available.

## ADDITIONAL INFORMATION

|                                                |                    |
|------------------------------------------------|--------------------|
| <b>Weight</b>                                  | 40 kg              |
| <b>Dimensions</b>                              | 840 × 460 × 300 cm |
| <b>Distance between centers with extension</b> | 1020 mm            |
| <b>Distance between centers</b>                | 457 mm             |

|                                           |          |
|-------------------------------------------|----------|
| <b>Voltage</b>                            | 230 V    |
| <b>Thread</b>                             | M33      |
| <b>Taper of tailstock sleeve</b>          | MT 2     |
| <b>Working diameter over<br/>guideway</b> | 305 mm   |
| <b>Working diameter over<br/>support</b>  | 240 mm   |
| <b>Travel of tailstock sleeve</b>         | 55 mm    |
| <b>RPM Min-Max</b>                        | 650-3800 |
| <b>Rotating head</b>                      | No       |