


LATHE TT457E









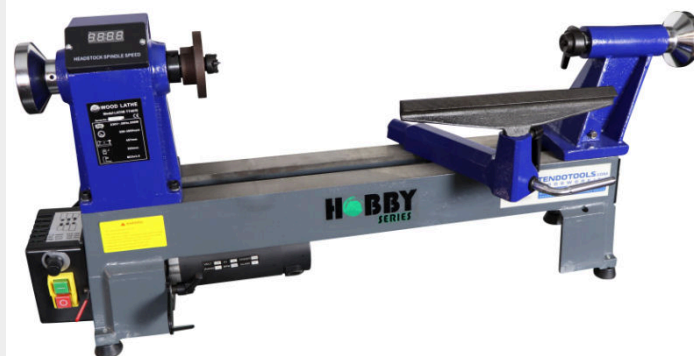

€412,39 (excl. VAT)

Thanks to the stability of its cast iron frame, the TT457E lathe guarantees a precise finish without vibrations. With its comprehensive basic equipment (LED display, continuous rotation speed control, etc.), this is the ideal entry-level model for hobbyists and amateur handymen.

SKU: OLA457S

GALERIJAFBEELDINGEN



MODEL	Lathe TT457E
	230V
	550W
	650-3800Tr/min
	457mm
	305mm
	M33
	840x460x300mm
	40KG

Thanks to the stability of its cast iron frame, the TT457E lathe guarantees a precise finish without vibrations. With its comprehensive basic equipment (LED display, continuous rotation speed control, etc.), this is the ideal entry-level model for hobbyists and amateur handymen.

The lathe has a point interval of 457 mm. It has an M33 x 3.5 mm thread on the spindle as standard, so all your favourite attachments fit without the need for adapters. In addition, the lathe has three continuously adjustable speeds. The speed is electronically adjustable and can be read digitally.

Thanks to the extension piece, you can extend the lathe to a point distance of 1007 mm.

PRODUCT INFORMATION

- Compact lathe for numerous small projects and precision work
 - 230 V/550 W induction motor
 - Three mechanical speeds that are easily adjustable
 - Spindle with M33 thread
 - Easily adjustable tool support
- Electronically adjustable rotation speed with digital display
 - Distance between centers: 457 mm
 - Extension optional

DESCRIPTION

Thanks to the stability of its cast iron frame, the TT457E lathe guarantees a precise finish without vibrations. With its comprehensive basic equipment (LED display, continuous rotation speed control, etc.), this is the ideal entry-level model for hobbyists and amateur handymen. The lathe has a point interval of 457 mm. It has an M33 x 3.5 mm thread on the spindle as standard, so all your favourite attachments fit without the need for adapters. In addition, the lathe has three continuously adjustable speeds. The speed is electronically adjustable and can be read digitally. Thanks to the extension piece, you can extend the lathe to a point distance of 1007 mm.

No video available for this product!

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

Weight	40 kg
Dimensions	840 × 460 × 300 cm
Distance between centers with extension	1020 mm
Distance between centers	457 mm

Voltage	230 V
Thread	M33
Taper of tailstock sleeve	MT 2
Working diameter over guideway	305 mm
Working diameter over support	240 mm
Travel of tailstock sleeve	55 mm
RPM Min-Max	650-3800
Rotating head	No