

MORTISER TT290

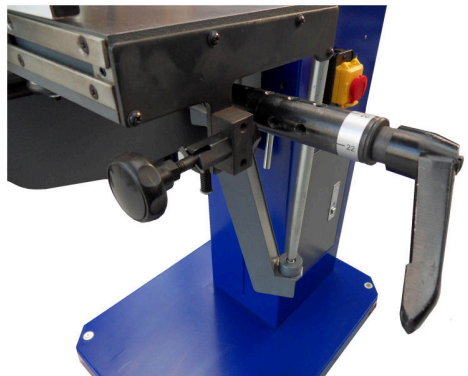









€991,73 (excl. VAT)

The Mortiser TT290 has a drilling table, fully fitted with ball bearings, which can be mounted in 2 positions and is equipped with a convenient storage compartment and a miter guide.

SKU: 0MO290S

GALERIJAFBEELDINGEN



MODEL	Morticer TT290
	230V~,50Hz,2200W 400V,3~,50Hz,2200W
	500x210mm
	16mm
	V=140mm La=290mm Lo=140mm
	100mm
	840X715X680mm
	97/117kg

This solid drilling table is fully fitted with ball bearings and has smooth operation in all directions with one steering lever. Both the drilling depth and lateral movements can be precisely adjusted, and the height adjustment of the drilling table is done with the handwheel. The workpiece is held firmly in place by the quick-release clamp.

The drilling table can be mounted in 2 positions: the top position for thinner pieces and the bottom position for very high workpieces. The rotating parts are shielded by a dust-free top cover that easily snaps open to replace the drill bit.

It features an integrated useful storage compartment and a clear miter guide. A wheel kit with steering lever, making it easy to move the machine, is also available as an option. This kit is compatibel with all machines in the Comfort Line.

Important: the drill head is right-turning.

PRODUCT INFORMATION

- Drilling table fully fitted with ball bearings
- Smooth operation in all directions with the steering lever
 - Height adjustment by handwheel
- Equipped with a quick-release clamp to hold the workpiece in place
 - Rotating parts are shielded by a dust-free top cover
 - Integrated storage compartment
 - Clear miter guide
- Rotor with 4 fixed positions (16, 22, 32 en 38 mm)
 - Wheel kit with steering lever (**option**)
 - Right-turning chuck

DESCRIPTION

This solid drilling table is fully fitted with ball bearings and has smooth operation in all directions with one steering lever. Both the drilling depth and lateral movements can be precisely adjusted, and the height adjustment of the drilling table is done with the handwheel. The workpiece is held firmly in place by the quick-release clamp. The drilling table can be mounted in 2 positions: the top position for thinner pieces and the bottom position for very high workpieces. The rotating parts are shielded by a dust-free top cover that easily snaps open to replace the drill bit. It features an integrated useful storage compartment and a clear miter guide. A wheel kit with steering lever, making it easy to move the machine, is also available as an option. This kit is compatibel with all machines in the Comfort Line. Important: the drill head is right-turning.

No video available for this product!

DOWNLOADS

No download availble.

ADDITIONAL INFORMATION

Weight

97 kg

Dimensions	840 x 715 x 680 cm
Motor	3 HP
Voltage	230 V
Worktable	500 x 210 mm
Exhaust	100mm
Chuck	16 mm
Longitudinal range	140 mm
Transverse range	290 mm
Vertical range	140 mm