

MULTIRADIUS SET R3/6, R4/8, R5/10 (Z=2) - Ø128MM



€282,64 - €295,04 (excl. VAT)

Cutter head in light alloy with blades in high quality tungsten carbide (HW) for machining of quarter rounds. The set comes delivered in a plastic box. With standard delivery the knives of radius 5/10 are mounted on the body. The knives of radius R3/6 and R4/8 are supplied within the box. Thanks to the tungsten carbide blades, this grooving cutter cuts effortlessly through solid boards or solid woods. Also suitable for use with plywood or chipboard.




Available with bore 30mm or 50mm.

SKU: N/A

VARIATIONS

Image	SKU	Description	Shaft diameter	Price
	ST-YS107BZM-50		50 mm	€295,04 (excl. VAT)
	ST-YS107BZM-30		30 mm	€282,64 (excl. VAT)

GALERIJAFBEELDINGEN

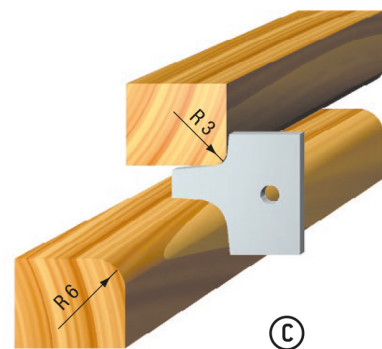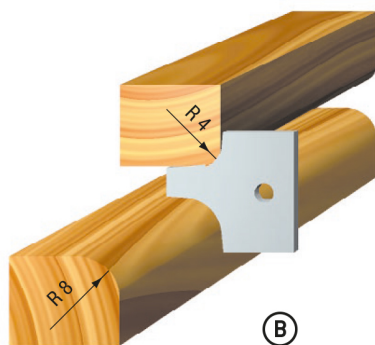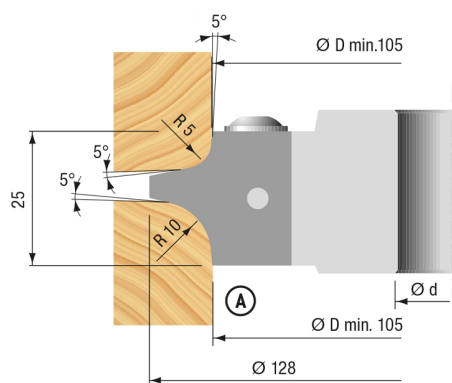

Cutter head in light alloy with blades in high quality tungsten carbide (HW) for machining of quarter rounds. The set comes delivered in a plastic box. With standard delivery the knives of radius 5/10 are mounted on the body. The knives of radius R3/6 and R4/8 are supplied within the box. Thanks to the tungsten carbide blades, this grooving cutter cuts effortlessly through solid boards or solid woods. Also suitable for use with plywood or chipboard.

Available with bore 30mm or 50mm.

PRODUCT INFORMATION

- For spindle moulder machines
 - Quarter round cutter
 - Different radius knives
- For laminated panels or MDF
 - Hard and soft wood

DESCRIPTION

Cutter head in light alloy with blades in high quality tungsten carbide (HW) for machining of quarter rounds. The set comes delivered in a plastic box. With standard delivery the knives of radius 5/10 are mounted on the body. The knives of radius R3/6 and R4/8 are supplied within the box. Thanks to the tungsten carbide blades, this grooving cutter cuts effortlessly through solid boards or solid woods. Also suitable for use with plywood or chipboard. Available with bore 30mm or 50mm.

No video available for this product!

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

Weight

1 kg

diameter	128mm
Shaft diameter	30 mm, 50 mm
Cutting edges	2
Height of groove	30mm
Radius	R3/6, R4/8, R5/10
RPM Min-Max	5900-9700