


## OSCILLATING SANDER TT2600KSM

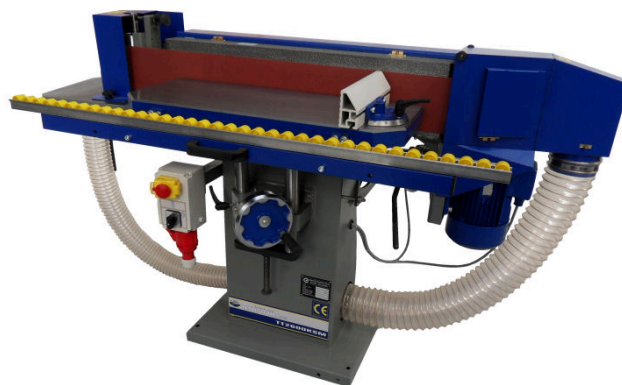


**€3 .200,00 (excl. VAT)**

The TT2600 KSM has a 2600 x 150 mm sanding belt that can be tilted 45 degrees and a separately driven oscillator. The height of the worktop is adjustable (185 mm) and an extraction output (80/100 mm) is provided on both sides.

**SKU:** RESB2600KSM

## GALERIJAFBEELDINGEN

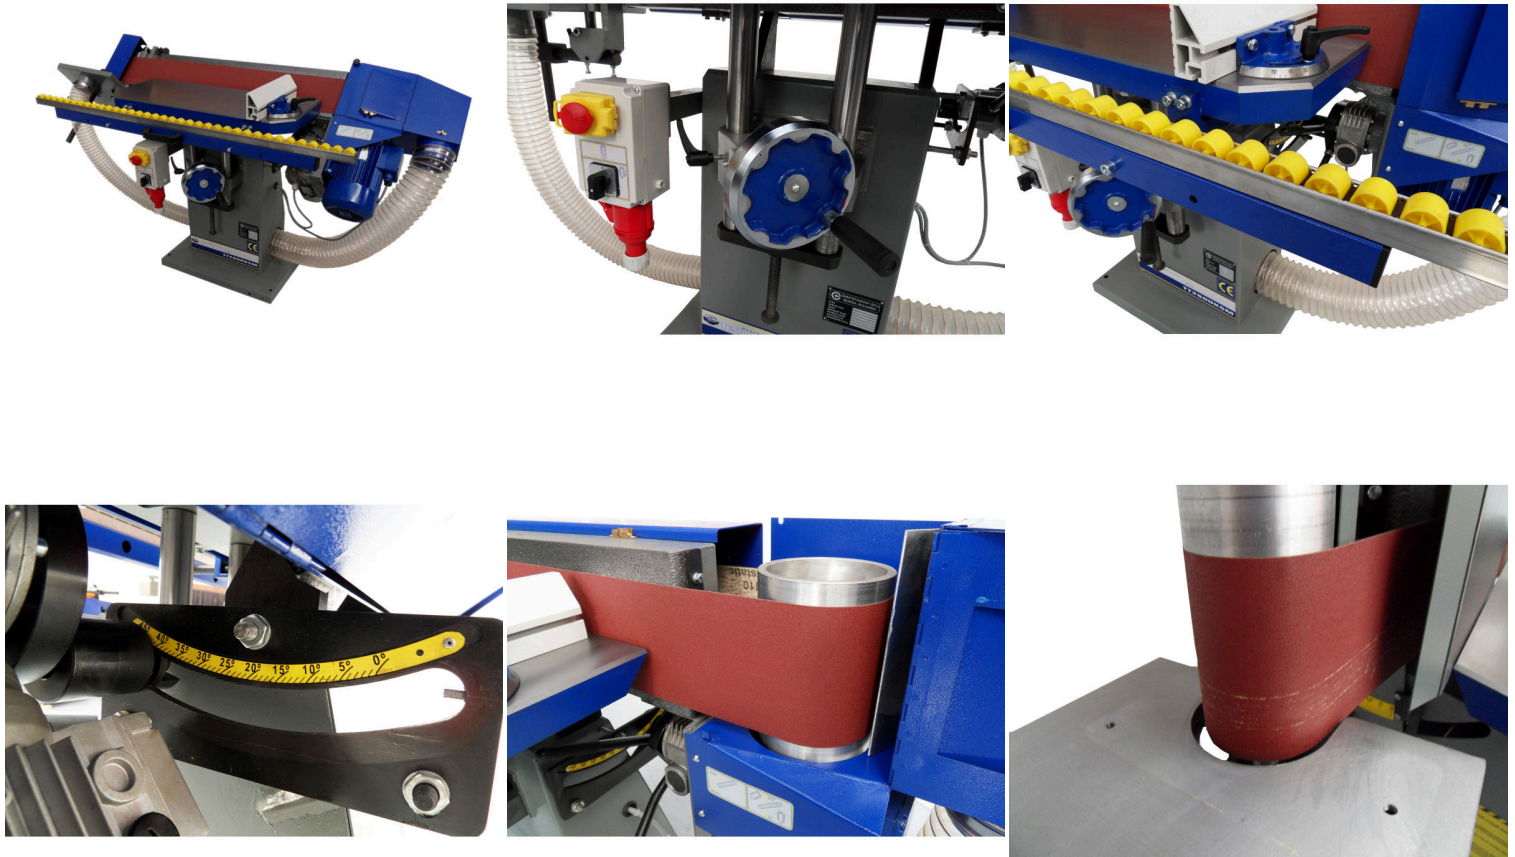

The TT2600 KSM has a very stable and strong machine frame that eliminates vibration. The sanding unit can be tilted to 45 degrees. The height of the work surface is adjustable (185 mm) so that the 2600 x 150 mm sanding belt is fully utilized. The machine is equipped with a contour table for sanding curves. The tension rollers are equipped with springs to compensate for the stretching of the sanding belt. The sanding belt has grit 100 as a standard, but is also available with grit 60, 80 and 150.

The oscillation of the sanding belt is driven by a separate motor.

This machine is suitable for sanding wood, plastic and similar materials. An extraction output (80/100 mm) is provided on both sides, so that the dust is optimally discharged. The work table can be easily adjusted in height with a wheel.

An extendable support with rollers is mounted on the machine, which facilitates the sanding of very large workpieces.

### PRODUCT INFORMATION

- Motor sanding belt: 400 V / 4 HP
- Motor oscillator: 400 V / 1/3 HP
- Easy height adjustment (185 mm)
- Oscillator driven by separate motor
- Contour table for circular sanding
- Tension rollers with springs to compensate for stretching of the sanding belt
  - Extraction nozzle on both sides: 80 mm and 100 mm
  - Sanding belt can be tilted to 45 degrees
    - Belt speed: 20 m/sec
  - Adjustable height by means of wheel

### DESCRIPTION

The TT2600 KSM has a very stable and strong machine frame that eliminates vibration. The sanding unit can be tilted to 45 degrees. The height of the work surface is adjustable (185 mm) so that the 2600 x 150 mm sanding belt is fully utilized. The machine is equipped with a contour table for sanding curves. The tension rollers are equipped with springs to compensate for the stretching of the sanding belt. The sanding belt has grit 100 as a standard, but is also available with grit 60, 80 and 150. The oscillation of the sanding belt is driven by a separate motor. This machine is suitable for sanding wood, plastic and similar materials. An extraction output (80/100 mm) is provided on both sides, so that the dust is optimally discharged. The work table can be easily adjusted in height with a wheel. An extendable support with rollers is mounted on the machine, which facilitates the sanding of very large workpieces.

No video available for this product!

### DOWNLOADS

No download available.

## ADDITIONAL INFORMATION

<b>Weight</b>	180 kg
<b>Dimensions</b>	1600 x 900 x 1350 cm
<b>Tilt</b>	45°
<b>Grain</b>	K60, K80, K100, K150
<b>Worktable</b>	330 x 330 mm, 750 x 300 mm
<b>Sanding belt</b>	2600 x 150 mm
<b>Motor</b>	0.33 HP, 4 HP
<b>Voltage</b>	400 V
<b>Oscillating</b>	Yes
<b>Belt speed</b>	20 m/sec