

## OSCILLATING SANDER TT3000KSM






**€4 .100,00 (excl. VAT)**

The TT3000KSM has a 3000 x 150 mm sanding belt that can be tilted 45 degrees, a separately driven oscillator and a grooved infeed ruler for veneer sanding. The height of the worktop is adjustable (210 mm) and an extraction outlet (80/100 mm) is provided on both sides.

**SKU:** RESB3000KSM

## GALERIJAFBEELDINGEN

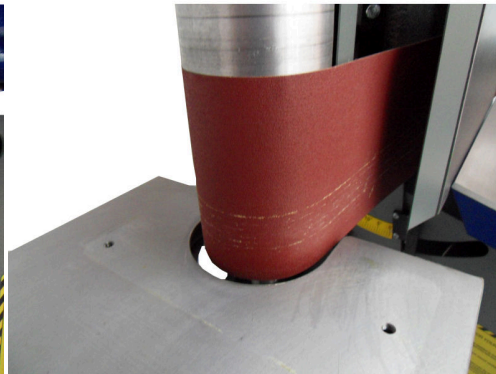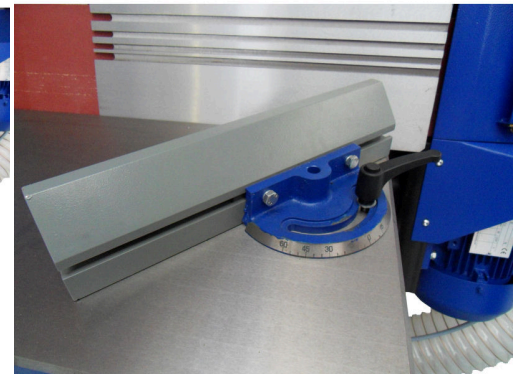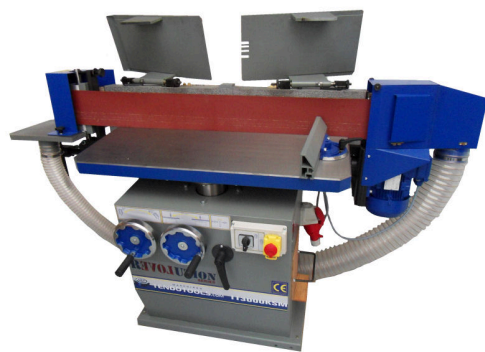

The TT3000KSM has a very stable and strong machine frame that eliminates vibration. The sanding unit can be tilted to 45 degrees. The height of the work surface is adjustable (210 mm) so that the 3000 x 150 mm sanding belt is fully utilized. The machine is equipped with a contour table for sanding curves. It has a grooved infeed ruler for veneer sanding and edge sanding on 1 side of the machine. The tension rollers are equipped with springs to compensate for the stretching of the sanding belt. The sanding belt has grit 100 as a standard, but is also available with grit 60, 80 and 150.

This machine has a unique advantage: by folding down the cast iron tables completely, you create a sanding unit that is ideally suited to veneer sanding.

This machine is suitable for sanding wood, plastic and similar materials. An extraction output (80/100 mm) is provided on both sides, so that the dust is optimally discharged. The front swivel wheels facilitate the

adjustment of the height of the work table and the tilting of the sanding unit.

The oscillation of the sanding belt is driven by a separate motor.

### PRODUCT INFORMATION

- Motor sanding belt: 400 V / 4 HP
- Motor oscillator: 400 V / 1/3 HP
- Easy height adjustment (210 mm)
- Oscillator driven by separate motor
- Contour table for circular sanding
- Tension rollers with springs to compensate for stretching of the sanding belt
  - Extraction outlet on both sides: 80 mm and 100 mm
  - Sanding belt can be tilted to 45 degrees
    - Belt speed: 20 m/sec
- Adjustable in height and tiltable by means of swivel wheels

### DESCRIPTION

The TT3000KSM has a very stable and strong machine frame that eliminates vibration. The sanding unit can be tilted to 45 degrees. The height of the work surface is adjustable (210 mm) so that the 3000 x 150 mm sanding belt is fully utilized. The machine is equipped with a contour table for sanding curves. It has a grooved infeed ruler for veneer sanding and edge sanding on 1 side of the machine. The tension rollers are equipped with springs to compensate for the stretching of the sanding belt. The sanding belt has grit 100 as a standard, but is also available with grit 60, 80 and 150. This machine has a unique advantage: by folding down the cast iron tables completely, you create a sanding unit that is ideally suited to veneer sanding. This machine is suitable for sanding wood, plastic and similar materials. An extraction output (80/100 mm) is provided on both sides, so that the dust is optimally discharged. The front swivel wheels facilitate the adjustment of the height of the work table and the tilting of the sanding unit. The oscillation of the sanding belt is driven by a separate motor.

No video available for this product!

## DOWNLOADS

No download available.

## ADDITIONAL INFORMATION

<b>Weight</b>	400 kg
<b>Dimensions</b>	1800 × 900 × 1350 cm
<b>Tilt</b>	45°
<b>Grain</b>	K60, K80, K100, K150
<b>Worktable</b>	330 x 330 mm, 960 x 350 mm
<b>Sanding belt</b>	3000 x 150 mm
<b>Motor</b>	0.33 HP, 4 HP
<b>Voltage</b>	400 V
<b>Oscillating</b>	Yes
<b>Belt speed</b>	20 m/sec