

OSCILLATING SPINDLE SANDER TT140




€495,04 (excl. VAT)

The TT140 is a spindle sander with oscillating motion and tilting work table, which comes standard with 3 sanding spindles.

SKU: 0SSCF140

GALERIJAFBEELDINGEN

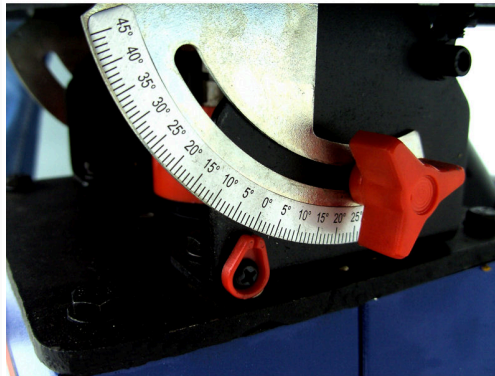

With this oscillating spindle sander, sanding round pieces becomes child's play.

This tabletop model is compatible with several thicknesses of sanding spindles. Thanks to the up and down movement (oscillation) of the sanding spindle, the sander does not leave streaks on the wood. It comes standard with three sanding spindles (20 x 90 mm, 35 x 140 mm and 50 x 140 mm) and five table inserts. The on-off switch has an undervoltage release, in accordance with IP54. The machine is further equipped with an extraction outlet on which a dust catcher can be placed. A convenient shelf is provided on the frame on which the sanding sleeves and table inserts can be placed.

The work table can be tilted 45° for oblique sanding.

PRODUCT INFORMATION

- Oscillating and rotating sanding roll
- Standard delivered with 3 sanding spindles and 5 table inserts
 - Extraction outlet 50 mm
 - Undervoltage release
- Work table (370 x 370 mm) can be tilted 45 degrees
 - Handy shelf
 - Motor 230 V / 370 W

DESCRIPTION

With this oscillating spindle sander, sanding round pieces becomes child's play. This tabletop model is compatible with several thicknesses of sanding spindles. Thanks to the up and down movement (oscillation) of the sanding spindle, the sander does not leave streaks on the wood. It comes standard with three sanding spindles (20 x 90 mm, 35 x 140 mm and 50 x 140 mm) and five table inserts. The on-off switch has an undervoltage release, in accordance with IP54. The machine is further equipped with an extraction outlet on which a dust catcher can be placed. A convenient shelf is provided on the frame on which the sanding sleeves and table inserts can be placed. The work table can be tilted 45° for oblique sanding.

No video available for this product!

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

Weight	33 kg
Dimensions	395 × 395 × 510 cm
Tilt	45°
Grain	K80, K100, K120
Voltage	230 V

Worktable	370 x 370 mm
Exhaust	50 mm
Spindle speed	1400 rpm