

OUTLET | ADAMIK PNEUMATIC VACUUM TABLE VC-5



~~€165,00~~ Original price was:
€165,00. €81,82 Current price is: **€81,82.** (excl. VAT)

Last pieces!


The ADAMIK VC-5 vacuum pad is a double-sided suction pad that attaches to the workbench with a push. Thanks to this technology, it is easy to change the dimensions of the machined surface. The VC-5 suction cup is designed to clamp non-porous workpieces during banding, milling, cutting, grinding, drilling,

The big advantage of the VC-5 suction cup is the method of creating a vacuum using the Venturi system, which compresses the workpiece by compressed air from a conventional compressor.

The suction cup can be used both horizontally and vertically.

SKU: OUTLET-ADAMIKVC5

GALERIJAFBEELDINGEN

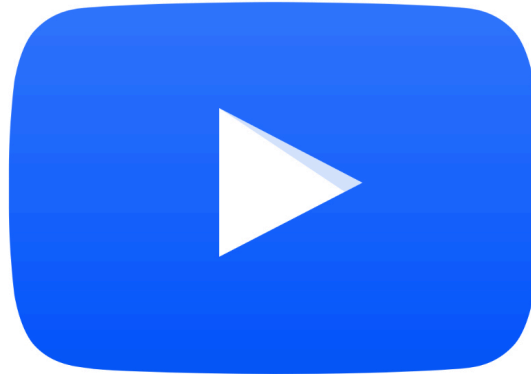

The ADAMIK VC-5 vacuum pad is a double-sided suction pad that attaches to the workbench with a push. Thanks to this technology, it is easy to change the dimensions of the machined surface. The VC-5 suction cup is designed to clamp non-porous workpieces during banding, milling, cutting, grinding, drilling,

The big advantage of the VC-5 suction cup is the method of creating a vacuum using the Venturi system, which compresses the workpiece by compressed air from a conventional compressor.

The suction cup can be used both horizontally and vertically.

PRODUCT INFORMATION

- Pneumatic vacuum table
 - External compressor
- Both horizontally and vertically
- Avoids damage to the workpiece

DESCRIPTION

The ADAMIK VC-5 vacuum pad is a double-sided suction pad that attaches to the workbench with a push.

Thanks to this technology, it is easy to change the dimensions of the machined surface. The VC-5 suction cup is designed to clamp non-porous workpieces during banding, milling, cutting, grinding, drilling, The big advantage of the VC-5 suction cup is the method of creating a vacuum using the Venturi system, which compresses the workpiece by compressed air from a conventional compressor. The suction cup can be used both horizontally and vertically.

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

Weight	0,325 kg
Dimensions	16 × 20 × 2,2 cm
Dimensions work surface	150x150mm
Holding force	800gr/cm² at 6 bar
Working pressure	5,5-7 bar
Air flow needed at 5.5 bars	28l/min