

## OUTLET | MITER SAW WITH PULL FUNCTION AND TOP TABLE M-SAW TT305SLU




**~~€785,12~~ Original price was:**  
**~~€785,12.~~ €549,59 Current price is: €549,59.**  
**(excl. VAT)**

### SHOWROOM MODEL

The TT305SLU has the same features as the pull-function mitre saw TT305SLX, but is additionally equipped with an extra-large top table that can be adjusted from 0 to 50 mm with a convenient control knob. It is equipped with a silent 1600 W induction motor that requires no maintenance and has a pull function of up to 350 mm, with a cutting height of up to 107 mm.

**SKU:** OUTLET-0MS305SLU

### GALERIJAFBEELDINGEN

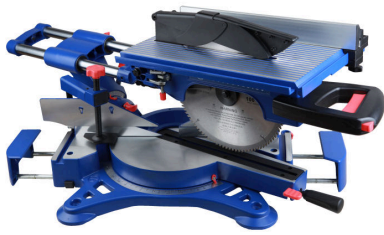

| MODEL             | 1     | 2            | 3         | 4         | 5        | 6        | 7        | 8                             | 9    |
|-------------------|-------|--------------|-----------|-----------|----------|----------|----------|-------------------------------|------|
| M-Saw<br>TT305SLU | 1600W | 305mm<br>60T | 0 - 50 mm | 350x107mm | 340x84mm | 240x70mm | 250x70mm | H=540mm<br>L=580mm<br>S=890mm | 34KG |

The TT305SLU has the same features as the pull-function mitre saw TT305SLX, but is additionally equipped with an extra-large top table that can be adjusted from 0 to 50 mm with a convenient control knob.

It is equipped with a silent 1600 W induction motor that requires no maintenance (which is a big advantage over the carbon brush motor in the smaller models) and has a pull function of up to 350 mm, with a cutting height of up to 107 mm.

The use of ball bearings on all joints ensures precise rotation of the table, head and tilting system. The saw has a die-cast aluminum body and can be tilted up to 48° in 2 directions. The silent, maintenance-free 1600 W induction motor delivers high torque and is positioned at the rear, giving the saw a large cutting height (up to 107 mm). The saw blade has a diameter of 305 mm and 60 teeth. The side supports are extendable.

The TT305SLU is further equipped with a horizontal D handle.

### PRODUCT INFORMATION

- Silent, maintenance-free 1600 W induction motor delivers 30% more power and is 40% more silent
  - 305 mm saw blade with 60 teeth
  - Large cutting height (up to 107 mm) due to the rear-mounted motor
- Extra large top table, adjustable from 0 to 50 mm with convenient control knob
  - Clear mitre indicator
- Saw can be tilted up to 48° in 2 directions
  - Die-cast aluminum body
- Ball bearings on all joints ensure precise rotation of the table, head and tilting system

### DESCRIPTION

The TT305SLU has the same features as the pull-function mitre saw TT305SLX, but is additionally equipped with an extra-large top table that can be adjusted from 0 to 50 mm with a convenient control knob. It is equipped with a silent 1600 W induction motor that requires no maintenance (which is a big advantage over the carbon brush motor in the smaller models) and has a pull function of up to 350 mm, with a cutting height of up to 107 mm. The use of ball bearings on all joints ensures precise rotation of the table, head and tilting system. The saw has a die-cast aluminum body and can be tilted up to 48° in 2 directions. The silent, maintenance-free 1600 W induction motor delivers high torque and is positioned at the rear, giving the saw a large cutting height (up to 107 mm). The saw blade has a diameter of 305 mm and 60 teeth. The side supports are extendable. The TT305SLU is further equipped with a horizontal D handle.

No video available for this product!

### DOWNLOADS

No download available.

### ADDITIONAL INFORMATION

|                               |                         |
|-------------------------------|-------------------------|
| <b>Weight</b>                 | 34 kg                   |
| <b>Dimensions</b>             | 580 × 890 × 540 cm      |
| <b>Max. cutting thickness</b> | 107 mm                  |
| <b>Input Power</b>            | 1600 W                  |
| <b>Cut 0° x 0°</b>            | 350 x 107 mm            |
| <b>Cut 0° x 45°</b>           | 240 x 94 mm             |
| <b>Cut 45° x 0°</b>           | 350 x 70 mm             |
| <b>Cut 45° x 45°</b>          | 240 x 70 mm, 55 x 55 mm |
| <b>Diameter sawblade</b>      | 305mm                   |