

PNEUMATIC DRILLING MACHINE FOR LINE BORING LINE DRILLER TT23EBM2





€6 .528,93 (excl. VAT)

The Line Driller TT23EBM2 is a drilling machine for line boring with 2 x 2.2 HP induction motor, 2 drill chucks with 23 spindles and pneumatic operation.

SKU: REBO23EBM/2

GALERIJAFBEELDINGEN

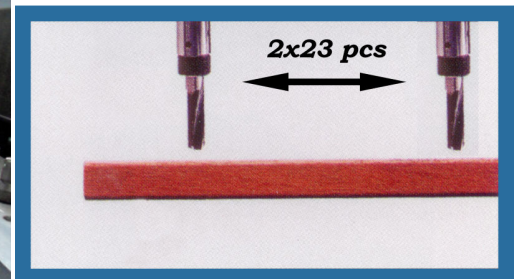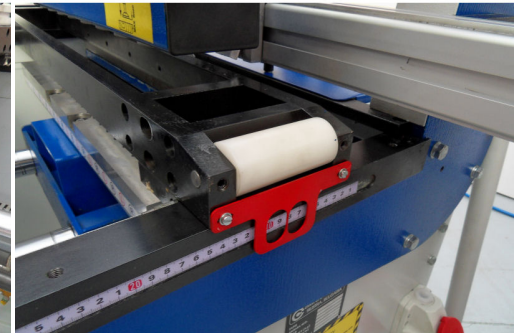

The Line Driller TT23EBM2 is a drilling machine for line boring with 2 x 2.2 HP induction motor, 2 drill chucks with 23 spindles and pneumatic operation.

The machine has two powerful 2.2 HP induction motors with a module of 23 bores at a time, each with a spacing of 32 mm. The aluminum guides are equipped with 4 handy quick stops. The machine has a stable cast iron work table of 1442 x 1026 mm and is equipped with pneumatic clamping (by means of nylon pressers) with possibility to adjust the pressure. It can be used for the pneumatic drilling of 46 boreholes in 1 go (on both sides of the workpiece). As a standard, the machine comes with 5 quick-change chucks.

Optionally, an easy-to-install module (adapter) for hinge boring (Blum, Hettich, Salice, Grass, Mepla, Mini, Maxi) is also available.

PRODUCT INFORMATION

- Powerful 2 x 2,2 HP induction motor
- Rotation speed of spindle: 2800 rpm
 - Pneumatic operation with pedal
- Pneumatic clamping with possibility to adjust the pressure (max. 6.5 bar)
- Two 23-spindle modules (12 right-turning + 11 left-turning), so 46 in total
 - Aluminum guides, equipped with 4 handy quick stops
 - Easy-to-assemble module for hinge boring
 - Large work surface (1442 x 1026 mm)
 - The machine comes with **5** quick-change chucks as a standard
 - The machine is supplied **without** the adapter for hinge boring
- Adapter for hinge boring (Blum, Hettich, Salice, Grass, Mepla, Mini, Maxi) (**optional**)
 - Boring depth up to 32 mm - Distance between first and last borehole: 704 mm

DESCRIPTION

The Line Driller TT23EBM2 is a drilling machine for line boring with 2 x 2.2 HP induction motor, 2 drill chucks with 23 spindles and pneumatic operation. The machine has two powerful 2.2 HP induction motors with a module of 23 bores at a time, each with a spacing of 32 mm. The aluminum guides are equipped with 4 handy quick stops. The machine has a stable cast iron work table of 1442 x 1026 mm and is equipped with pneumatic clamping (by means of nylon pressers) with possibility to adjust the pressure. It can be used for the pneumatic drilling of 46 boreholes in 1 go (on both sides of the workpiece). As a standard, the machine comes with 5 quick-change chucks. Optionally, an easy-to-install module (adapter) for hinge boring (Blum, Hettich, Salice, Grass, Mepla, Mini, Maxi) is also available.

No video available for this product!

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

Weight	570 kg
---------------	--------

Dimensions	1450 × 1030 × 1250 cm
Line boring	2 x 23 spindles (32 mm apart)
Boring depth	Up to 32 mm
Motor	2 x 2.2 HP