

## PNEUMATIC VACUUM TABLE SVN470 - AUXILIARY SUPPORT TILTABLE 90°




**€282,02 (excl. VAT)**

This pneumatic vacuum table on tiltable support is designed to clamp smooth, non-porous workpieces. The vacuum between the base of the table and the workpiece ensures firm clamping and leaves no traces after use. The head of the support can tilt 90° so that you can place the workpiece in an ideal position. The support must be secured with clamps (not included). This support is specifically designed to connect to the SVN450 or SVN460 model. No direct connection to the compressor as model SVN450 or SVN460.

**SKU:** VIR-SVN470

## GALERIJAFBEELDINGEN

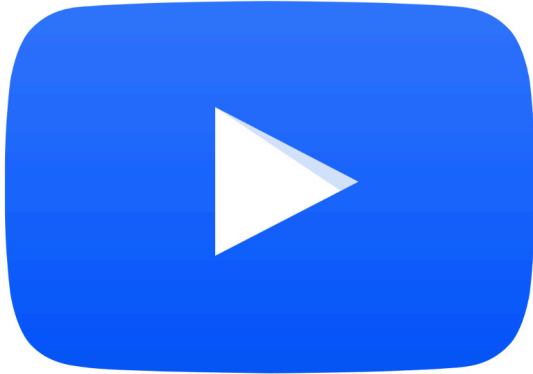

This pneumatic vacuum table on tiltable support is designed to clamp smooth, non-porous workpieces. The vacuum between the base of the table and the workpiece ensures firm clamping and leaves no traces after use. The head of the support can tilt 90° so that you can place the workpiece in an ideal position. The support must be secured with clamps (not included). This support is specifically designed to connect to the SVN450 or SVN460 model. No direct connection to the compressor as model SVN450 or SVN460.

## PRODUCT INFORMATION

- Pneumatic vacuum table
  - With tiltable support
  - Can be tilted by 90°
- Avoids damage to the workpiece

## DESCRIPTION

This pneumatic vacuum table on tiltable support is designed to clamp smooth, non-porous workpieces. The vacuum between the base of the table and the workpiece ensures firm clamping and leaves no traces after use. The head of the support can tilt 90° so that you can place the workpiece in an ideal position. The support must be secured with clamps (not included). This support is specifically designed to connect to the SVN450 or SVN460 model. No direct connection to the compressor as model SVN450 or SVN460.

## DOWNLOADS

No download available.

## ADDITIONAL INFORMATION

<b>Weight</b>	1 kg
<b>Dimensions work surface</b>	150x150mm
<b>Holding force</b>	800gr/cm <sup>2</sup> at 6 bar
<b>Working pressure</b>	5,5-7 bar
<b>Air flow needed at 5.5 bars</b>	28l/min