

PROFESSIONAL LATHE TT975PRO2





€2 .975,20 (excl. VAT)

The TT975 Pro2 lathe is a device for professional applications. It offers you a wide range of possibilities and has a wide range of electronically adjustable speeds.

SKU: 0LAW910S

GALERIJAFBEELDINGEN

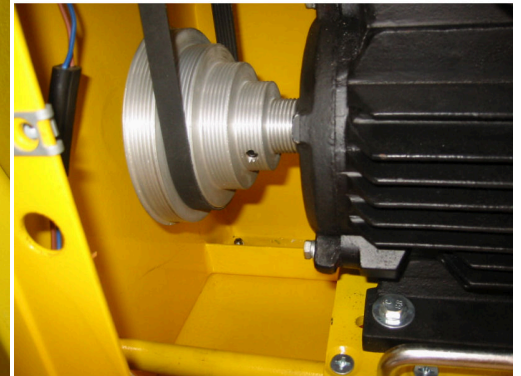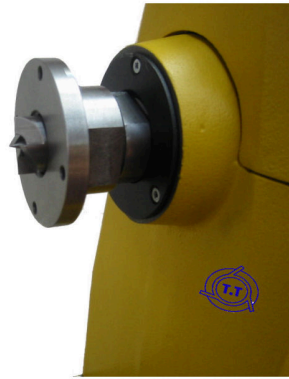

The TT975 Pro2 lathe is a device from our Comfort Line for professional applications. It has a strong steel base with built-in engine drive and storage compartment for optimal stability. It offers you a wide range of capabilities, including reverse turning and sanding. With its distance between the centers of 975 mm, it can also turn large pieces. It has 5 belt positions.

The TT975 Pro2 has a wide range of electronically adjustable speeds. The vibration-absorbing bed, head, tail rest, tool rest and tool rest arm in cast iron are of high quality.

The 4 large (62 mm), rubber-covered ball bearings have a lifetime warranty. The tail rest with eccentric clamping and the tool rest arm preclude tensioners. The hollow shafts of the head rest and tail rest allow for deep hole drilling. The powerful air-cooled motor is fully incorporated. The control panel can be moved.

PRODUCT INFORMATION

- Strong steel base
- Built-in engine drive
- Powerful air-cooled engine
 - 5 belt positions
- Electronically adjustable speeds (large range)
 - Tail rest with eccentric clamping
- Head and tail support with hollow shafts
 - Control panel can be moved

DESCRIPTION

The TT975 Pro2 lathe is a device from our Comfort Line for professional applications. It has a strong steel base with built-in engine drive and storage compartment for optimal stability. It offers you a wide range of capabilities, including reverse turning and sanding. With its distance between the centers of 975 mm, it can also turn large pieces. It has 5 belt positions. The TT975 Pro2 has a wide range of electronically adjustable speeds. The vibration-absorbing bed, head, tail rest, tool rest and tool rest arm in cast iron are of high quality.

The 4 large (62 mm), rubber-covered ball bearings have a lifetime warranty. The tail rest with eccentric clamping and the tool rest arm preclude tensioners. The hollow shafts of the head rest and tail rest allow for deep hole drilling. The powerful air-cooled motor is fully incorporated. The control panel can be moved.

No video available for this product!

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

| | |
|---------------------------------|---------------------|
| Weight | 330 kg |
| Dimensions | 1520 × 570 × 555 cm |
| Distance between centers | 910 mm |

| | |
|---|---------|
| Working diameter over guideway | 520 mm |
| Rotating head | No |
| Taper of tailstock sleeve | MT 2 |
| Motor | 2 PK |
| Thread | M33 |
| RPM Min-Max | 50-3890 |
| Voltage | 230 V |