

## RABBETING CUTTER HEAD 50MM (Z=2 + V=4) - Ø125MM





**€153,70 - €166,94 (excl. VAT)**

Cutterhead with alternate shear reversible knives and spurs in high quality carbide (HW). The blades have an alternate axial angle for improved cutting results. Thanks to the pre-cutters at the top and bottom, your work always has a clean finish. Perfectly suited for rabbeting. Thanks to the tungsten carbide blades, this cutterhead cuts effortlessly through solid boards, hard and soft woods, MDF or laminated boards.




Available with bore 30mm or 50mm.

**SKU:** N/A

## VARIATIONS

Image	SKU	Description	Shaft diameter	Price
	ST-YH151ACM-50		50 mm	€166,94 (excl. VAT)
	ST-YH151ACM-30		30 mm	€153,70 (excl. VAT)

## GALERIJAFBEELDINGEN

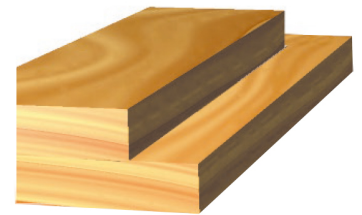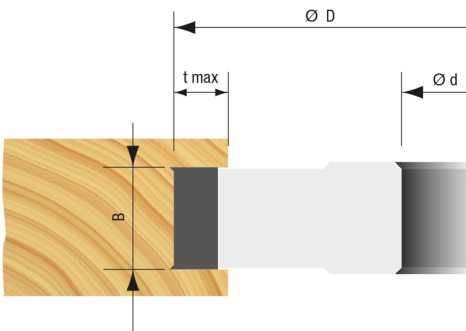

Cutterhead with alternate shear reversible knives and spurs in high quality carbide (HW). The blades have an

alternate axial angle for improved cutting results. Thanks to the pre-cutters at the top and bottom, your work always has a clean finish. Perfectly suited for rabbeting. Thanks to the tungsten carbide blades, this cutterhead cuts effortlessly through solid boards, hard and soft woods, MDF or laminated boards.

Available with bore 30mm or 50mm.

### PRODUCT INFORMATION

- For spindle moulder machines
  - For rabbeting
- Clean cut thanks to the spurs on both sides
  - For laminated panels or MDF
  - Hard and soft wood

### DESCRIPTION

Cutterhead with alternate shear reversible knives and spurs in high quality carbide (HW). The blades have an alternate axial angle for improved cutting results. Thanks to the pre-cutters at the top and bottom, your work always has a clean finish. Perfectly suited for rabbeting. Thanks to the tungsten carbide blades, this cutterhead cuts effortlessly through solid boards, hard and soft woods, MDF or laminated boards. Available with bore 30mm or 50mm.

No video available for this product!

### DOWNLOADS

No download available.

### ADDITIONAL INFORMATION

<b>Weight</b>	1 kg
<b>diameter</b>	125mm
<b>Shaft diameter</b>	30 mm, 50 mm
<b>Cutting edges</b>	2

<b>Number of teeth</b>	4
<b>Cutting length</b>	32mm
<b>Height of groove</b>	50mm
<b>RPM Min-Max</b>	6100-10600