

## TABLE SAW HARVEY ALPHA HW110LC-36P - 36" (910 MM) - 2 HP



**€3 .170,00 (excl. VAT)**

The latest Harvey sawing machine has arrived in Europe! The Harvey Alpha. This machine has a new even smarter design, supplied as standard with the superb, accurate miter guide, the Harvey Miter Gauge. worth €699 (excluding VAT).

230V, 2 HP motor.


With back table and right-hand table made of chipboard. Parallel fence up to 91 cm right, saw blade angle adjustable to LEFT up to 45 degrees.

Single-phase motors should have a minimum of 16A delayed fuse.

INCLUDING MG-36-P COMPASS MITER GAUGE worth €699 !

**SKU: HAR-HW110LC36P**

## GALERIJAFBEELDINGEN

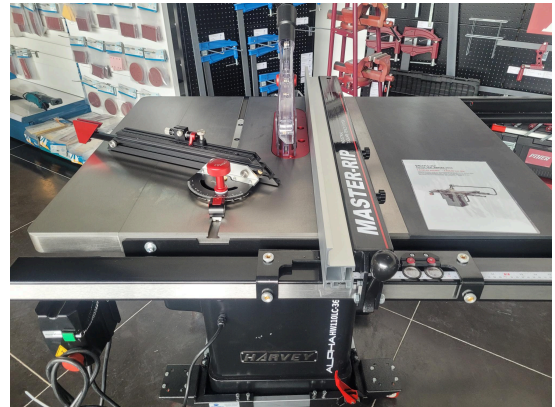

The latest Harvey sawing machine has arrived in Europe! The Harvey Alpha. This machine has a new even smarter design, supplied as standard with the superb, accurate miter guide, the Harvey Miter Gauge. worth €699 (excluding VAT).

230V, 2 HP motor.

With back table and right-hand table made of chipboard. Parallel fence up to 91 cm right, saw blade angle adjustable to LEFT up to 45 degrees.

Single-phase motors should have a minimum of 16A delayed fuse.

## PRODUCT INFORMATION

- Precision-cut cast iron worktable
  - 2 HP TEFC motor
  - Spacer for maximum safety
- Quick change of spacer and extractor hood
- Magnetic safety switch with thermal protection
  - Including unique mitre gauge
- Standard provided for placement of dado grooving set
- High quality rip fence for high accuracy and reliability

- Industrial powerful belt drive Poly-belt
- Precision T-slots left and right along the saw blade
- Suitable for mounting dado groove saw blades

### DESCRIPTION

The latest Harvey sawing machine has arrived in Europe! The Harvey Alpha. This machine has a new even smarter design, supplied as standard with the superb, accurate miter guide, the Harvey Miter Gauge. worth €699 (excluding VAT). 230V, 2 HP motor. With back table and right-hand table made of chipboard. Parallel fence up to 91 cm right, saw blade angle adjustable to LEFT up to 45 degrees. Single-phase motors should have a minimum of 16A delayed fuse.

No video available for this product!

### DOWNLOADS

No download available.

### ADDITIONAL INFORMATION

<b>Weight</b>	240 kg
<b>Voltage</b>	230 V
<b>Motor</b>	2 PK
<b>Diameter sawblade</b>	250mm
<b>Cutting depth 45°</b>	50mm
<b>Cutting depth 90 °</b>	70mm
<b>Saw blade speed</b>	4150
<b>Max. width DADO</b>	15mm
<b>Dust collection port</b>	100 mm
<b>Max. width left saw blade</b>	305 mm
<b>Max. width right saw blade</b>	750 mm

<b>T-slots</b>	2
<b>Working height</b>	860mm
<b>Worktable</b>	508 x 685mm