

PLANER THICKNESSER TRIPLE MEDIUM TT310



€2 .628,09 (excl. VAT)



Powerful, robust surface planing and thicknessing machine with induction motor, suitable for every workshop. This machine is available with a 230V or three-phase 400V motor. Thanks to its sturdy steel design with cast iron worktops, it can withstand heavy daily use. The work tables are fitted with a heavy profile at the bottom to maintain their flatness at all times. The tables are hinged independently and can be raised. For very precise planing, this machine is equipped with a sturdy, aluminium guide at the top.

This guide can be set at an angle with two stops for 90° and 45°.


This machine is equipped with planing blades of 1.5mm thickness as standard. Thicker planing blades (3mm) are available on request.


SKU: 0TC310

VARIATIONS

Image	SKU	Description Voltage	Price
	0TCF310T	3 x 400V	€2 .628,09 (excl. VAT)
	0TCF310S	230 V	€2 .628,09 (excl. VAT)

GALERIJAFBEELDINGEN

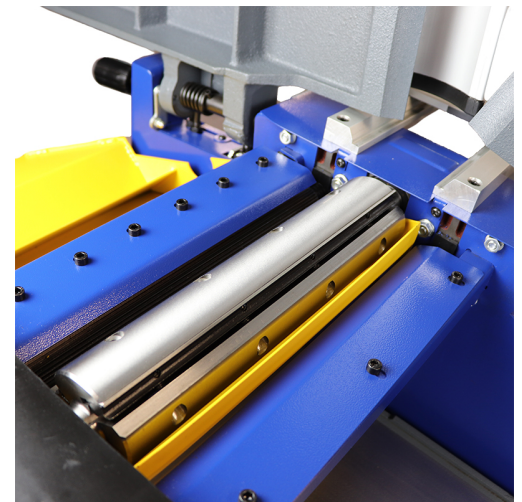

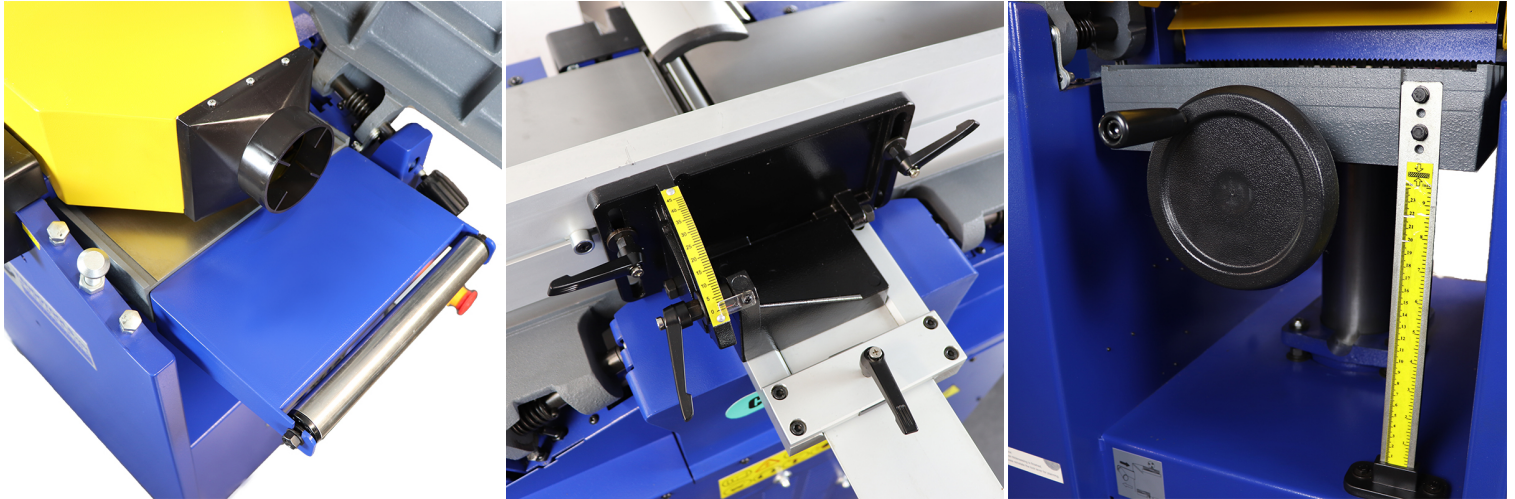

Powerful, robust planer thicknesser with induction motor, suitable for every workshop. This machine is available with a 230V or three-phase 400V motor. Thanks to its sturdy steel design with cast iron worktops, it can withstand heavy daily use. The work tables are fitted with a heavy profile at the bottom to maintain their flatness at all times. The tables are hinged independently and can be raised. In this way, you can make maximum use of the capabilities of the thicknessing machine.

This thicknessing machine is easily adjustable by means of a smoothly rotating, steplessly spinning wheel. Equipped with a millimetre scale so you can easily read off the correct height. During work, the thicknessing unit remains in position without any problems thanks to the locking device. In combination with the feed speed of 6m/min, this ensures a very smooth, even finish on all your workpieces.

For very precise planing, this machine is equipped with a sturdy, aluminium guide at the top. This guide can be set at an angle with two stops for 90° and 45°. With the help of the heavy planing block, equipped with three planing blades, a good finish is always guaranteed. The chips are discharged via a hinged hood. This hood can be connected to a dust extraction system using the Ø100mm outlet. This machine is equipped with planing blades of 1.5mm thickness as standard. Thicker planing blades (3mm) are available on request.

PRODUCT INFORMATION

- Compact and robust machine
 - Planing width 310mm
- Heavy duty planer block with three blades

- Solid cast iron worktables
- Aluminium guide (tiltable)
- Equipped with connection for dust extraction
 - Work tables can be folded away

DESCRIPTION

Powerful, robust planer thicknesser with induction motor, suitable for every workshop. This machine is available with a 230V or three-phase 400V motor. Thanks to its sturdy steel design with cast iron worktops, it can withstand heavy daily use. The work tables are fitted with a heavy profile at the bottom to maintain their flatness at all times. The tables are hinged independently and can be raised. In this way, you can make maximum use of the capabilities of the thicknessing machine. This thicknessing machine is easily adjustable by means of a smoothly rotating, steplessly spinning wheel. Equipped with a millimetre scale so you can easily read off the correct height. During work, the thicknessing unit remains in position without any problems thanks to the locking device. In combination with the feed speed of 6m/min, this ensures a very smooth, even finish on all your workpieces. For very precise planing, this machine is equipped with a sturdy, aluminium guide at the top. This guide can be set at an angle with two stops for 90° and 45°. With the help of the heavy planing block, equipped with three planing blades, a good finish is always guaranteed. The chips are discharged via a hinged hood. This hood can be connected to a dust extraction system using the Ø100mm outlet. This machine is equipped with planing blades of 1.5mm thickness as standard. Thicker planing blades (3mm) are available on request.

No video available for this product!

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

Weight	272 kg
Dimensions	115,5 × 52,5 × 95,5 cm
Motor	4 HP, 5 HP
Voltage	230 V, 3 x 400V

Planing width	310 mm
Planing table dimensions	1380x310mm
Ø planing block	70mm
Nominal speed of planing axis	4800rpm
Number of planing knives	3
Planing blade dimensions	310x19x1mm
Max. planing depth	4mm
Thicknesser table dimensions	540x306mm
Height thicknesser	225mm
Depth of cut thicknesser	3mm
Feed speed thicknesser	6m/min