

SAW BLADE 'XTRA CUT' FOR ALUMINIUM HOLLOW Ø500MM - BORE 30MM



€242,00 - €248,00 (excl. VAT)

Saw blade with 120 teeth

Saw blade 'Xtra Cut' with FZ/TR 'triple chip' teeth and a positive hook angle of 5°. This saw blade is suited for use with aluminium (hollow), PVC and non-ferro metals and can be used for cutting of aluminium profiles and extrusions with a thickness between 2 and 5mm. No-noise and less vibration thanks to a special synthetic resin filled in the slots to increase the stability and reduce vibrations. No noise.




Available in different thickness.

SKU: N/A

VARIATIONS

Image	SKU	Description	Thickness teeth	Price
	KL-LA50012030		4,6mm	€242,00 (excl. VAT)
	KL-LA50012130		4,0mm	€248,00 (excl. VAT)

GALERIJAFBEELDINGEN

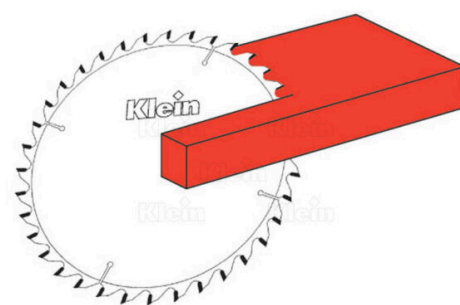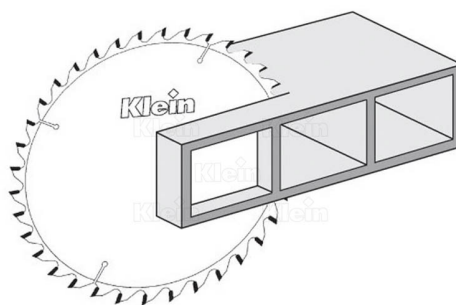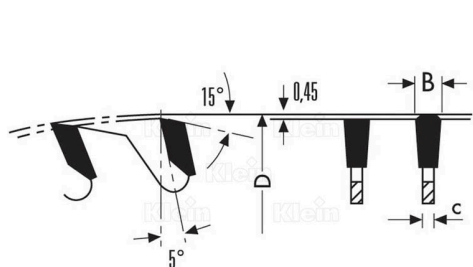

Saw blade with 120 teeth

Saw blade 'Xtra Cut' with FZ/TR 'triple chip' teeth and a positive hook angle of 5°. This saw blade is suited for use with aluminium (hollow), PVC and non-ferro metals and can be used for cutting of aluminium profiles and extrusions with a thickness between 2 and 5mm. To be used on table saws. These saw blades offer great finish and longer life. No-noise and less vibration thanks to a special synthetic resin filled in the slots to increase the stability and reduce vibrations. No noise.

Make sure to use the right amount of teeth to achieve optimal results of your project. A low number of teeth is suited for fast-paced and rough sawing. A high number of teeth calls for a lower operating speed but guarantees a clean cut. Available in different thickness.

PRODUCT INFORMATION

- Fine cut HW saw blade
- FZ/TR triple chip teeth
- For aluminium profiles
- For PVC and non-ferro metals
 - No noise
- Increased stability and reduced vibrations
 - Positive hook angle 5°

DESCRIPTION

Saw blade with 120 teeth Saw blade 'Xtra Cut' with FZ/TR 'triple chip' teeth and a positive hook angle of 5°. This saw blade is suited for use with aluminium (hollow), PVC and non-ferro metals and can be used for cutting of aluminium profiles and extrusions with a thickness between 2 and 5mm. To be used on table saws. These saw blades offer great finish and longer life. No-noise and less vibration thanks to a special synthetic resin filled in the slots to increase the stability and reduce vibrations. No noise. Make sure to use the right amount of teeth to achieve optimal results of your project. A low number of teeth is suited for fast-paced and rough sawing. A high number of teeth calls for a lower operating speed but guarantees a clean cut. Available in different thickness.

No video available for this product!

DOWNLOADS

No download available.

ADDITIONAL INFORMATION

Weight	1 kg
Diameter sawblade	500mm
Shaft diameter	30 mm
Thickness teeth	4,0mm, 4,6mm
Thickness Sawblade	3,2mm, 3,6mm
Number of teeth	120
Pin holes	2/11/63